



Alfa Laval CB400

Brazed plate heat exchanger

Alfa Laval CB brazed plate heat exchangers provide efficient heat transfer with a small footprint.

Applications

- HVAC heating and cooling
- Refrigeration
- Oil cooling
- Industrial heating and cooling

Benefits


- Compact
- · Easy to install
- Self-cleaning
- Low level of service and maintenance is required
- All units are pressure and leak tested
- · Gasket free

Design

The brazing material seals and holds the plates together at the contact points ensuring optimal heat transfer efficiency and pressure resistance. Using advanced design technologies and extensive verification guarantees the highest performance and longest possible service life.

Based on standard components and a modular concept, each unit is custom-built to meet the specific requirements of each individual installation.

Examples of connections







Welding



Clamp



Technical Data Standard materials

| Clarida d'Inatoriais | | |
|----------------------|-----------------|--|
| Cover plates | Stainless steel | |
| Connections | Stainless steel | |
| Plates | Stainless steel | |

| Connections | Stainless steel |
|----------------|-----------------|
| Plates | Stainless steel |
| Brazing filler | Copper |
| | |

| Dimensions | |
|------------|--|
| | |
| | |
| | |

| A measure (mm) | 14 + (2.56 * n) |
|--------------------------|--------------------|
| A measure (inches) | 0.55 + (0.1 * n) |
| Weight (kg) ² | 24 + (1.35 * n) |
| Weight (lb) ² | 52.91 + (2.98 * n) |

- n = number of plates 1.
- Excluding connections


Standard data

| Volume per channel, litres (gal) | 0.74 (0.19) |
|--|-------------|
| Max. particle size, mm (inch) | 1.8 (0.071) |
| Max. flowrate ¹ m ³ /h (gpm) | 200 (880) |
| | |
| Flow direction | Parallel |
| Flow direction Min. number of plates | Parallel 10 |
| | |

Water at 5 m/s (16.4 ft/s) (connection velocity)


Dimensional drawing

Measurements in mm (inches)

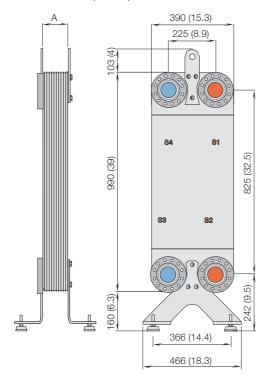


Design pressure and temperature

CB400 - PED approval pressure/temperature graph

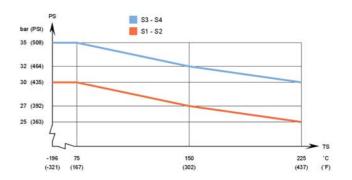

CB400 - UL approval pressure/temperature graph



Designed for full vacuum.

Alfa Laval plate heat exchangers are available with a wide range of pressure vessel approvals. Please contact your Alfa Laval representative for more information.

NOTE: Values above are to be used as an indication. For exact values, please use the drawing generated by the Alfa Laval configurator or contact your local Alfa Laval representative.

Marine Approvals

CBM400 can be delivered with marine classification certificate (ABS, BV, CCS, ClassNK, DNV, GL, LR, RINA, RMRS)

CHE00033EN 2016-04

Alfa Laval reserves the right to change specifications without prior notification.

