



## Alfa Laval CD300

### Brazed plate heat exchanger for compressed air drying

Alfa Laval CD - CombiDryers are brazed plate heat exchangers designed for separation of humidity in compressed air.

#### Applications

- Compressed air drying

#### Benefits


- Compact
- Easy to install
- Self-cleaning
- Low level of service and maintenance is required
- All units are pressure and leak tested
- Gasket free

#### Design


The brazing material seals and holds the plates together at the contact points ensuring optimal heat transfer efficiency and pressure resistance. Using advanced design technologies and extensive verification guarantees the highest performance and longest possible service life.

The CombiDryer brazed plate heat exchangers are specifically designed with a unique double-circuit configuration for separation of humidity in compressed air.

#### Examples of connections



Soldering



Welding



## Technical Data

### Standard materials

Cover plates	Stainless steel
Connections	Stainless steel
Plates	Stainless steel
Brazing filler	Copper

### Dimensions and weight<sup>1</sup>

A measure (mm)	$10 + (2.72 * n)$
A measure (inches)	$0.39 + (0.11 * n)$
Weight (kg) <sup>2</sup>	$4 + (0.37 * n)$
Weight (lb) <sup>2</sup>	$8.82 + (0.82 * n)$

- n = number of plates
- Excluding connections


### Standard data

Volume per channel, litres (gal)	0.24 (0.062)
Max. flowrate <sup>1</sup> m <sup>3</sup> /h (gpm)	93 (409)
Flow direction	Diagonal
Min. number of plates	10
Max. number of plates	200

- Water at 5 m/s (16.4 ft/s) (connection velocity)


### Dimensional drawing

Measurements in mm (inches)

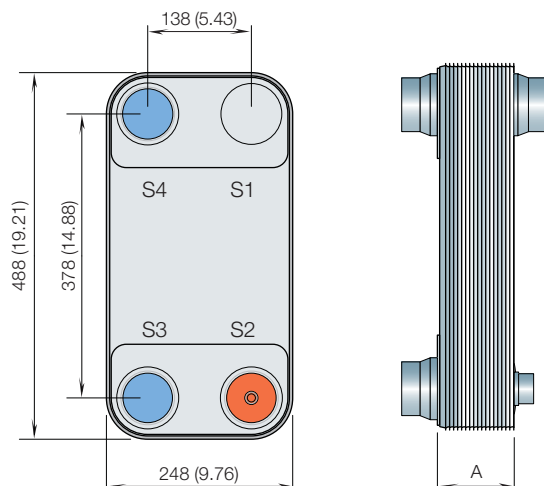


## Design pressure and temperature

### CD300 – PED approval pressure/temperature graph

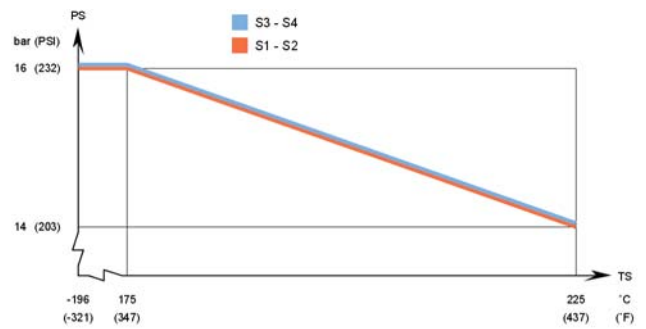

### CD300 – UL approval pressure/temperature graph

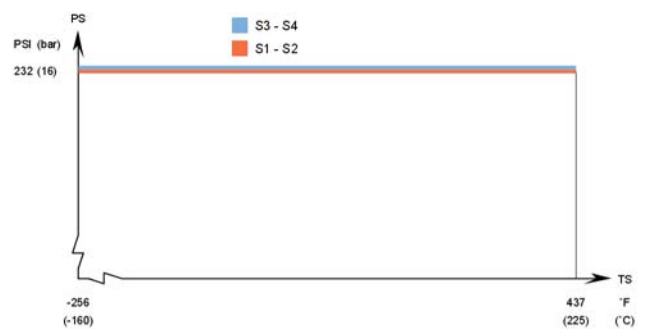

Designed for full vacuum.

Alfa Laval plate heat exchangers are available with a wide range of pressure vessel approvals. Please contact your Alfa Laval representative for more information.

**NOTE:** Values above are to be used as an indication. For exact values, please use the drawing generated by the Alfa Laval configurator or contact your local Alfa Laval representative.