

housings Plus 3P BX

for quick-fit cartridges with double O-ring



Medium

Junior

Master

Senior

APPLICATIONS

Filtration and treatment of water with neutral pH and drinking water.

Domestic use: filtration and treatment of drinking water, protection of taps, boilers, washing machines, and other installations.

Technical use: pre-filtration, micro-filtration; protection of pumps, heating systems, softeners, demineralising and chlorine-removing appliances, reverse osmosis units.

WORKING CONDITIONS

Max working pressure _____ 8 BAR

Max working temperature _____ 45°C

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.

Head and ring nut: reinforced polypropylene.

Transparent bowl: SAN.

O-ring: ETP.

Breather-valve: body polypropylene, O-ring ETP.

IN/OUT threads: CW 614 N brass inserts.

cartridge height	housings with transparent bowl AS IN/OUT female threads with FO brass inserts	IN/OUT threads	mm	
			A	B
5"	Medium Plus 3P MFO BX AS	1/2"	191	133
5"	Medium Plus 3P AFO BX AS	3/4"	191	133
5"	Medium Plus 3P BFO BX AS	1"	197	145
7"	Junior Plus 3P MFO BX AS	1/2"	241	133
7"	Junior Plus 3P AFO BX AS	3/4"	241	133
7"	Junior Plus 3P BFO BX AS	1"	247	145
10"	Senior Plus 3P MFO BX AS	1/2"	315	133
10"	Senior Plus 3P AFO BX AS	3/4"	315	133
10"	Senior Plus 3P BFO BX AS	1"	321	145
20"	Master Plus 3P MFO BX AS	1/2"	571	133
20"	Master Plus 3P AFO BX AS	3/4"	571	133
20"	Master Plus 3P BFO BX AS	1"	577	145




VARIANTS available on minimum quantity

FP female plastic IN/OUT threads, BSP type 3/8", 3/4", 1".

AB housings with opaque bowl, impermeable to the light.

S bowl with discharge ball-valve for self-cleaning functioning (only SENIOR type).

MP male plastic IN/OUT threads, BSP type.

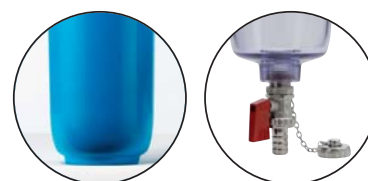

accessories



-U- Spanner



-S- wall bracket



wall bracket screws



3/4" and 1", brass nipples with O-ring

