

**DOWEX™ MARATHON™ A LB**

A Uniform Particle Size, Strong Base Anion Exchange Resin Specifically Designed for Layered Bed Applications

Product	Type	Matrix	Functional group
DOWEX™ MARATHON™ A LB	Type I strong base anion	Styrene-DVB, gel	Quaternary amine

Guaranteed Sales Specifications		Cl ⁻ form
Total exchange capacity, min.	eq/L	1.2
	kg/ft ³ as CaCO ₃	26.2
Water content	%	50 - 56
Uniformity coefficient, max.		1.1

Typical Physical and Chemical Properties

Mean particle size [†]	µm	650 ± 50
Whole uncracked beads	%	90
Total swelling (Cl ⁻ → OH ⁻)	%	20
Particle density	g/mL	1.09
Shipping weight	g/L	705
	lbs/ft ³	44

Recommended Operating Conditions

- Maximum operating temperature:
 - OH⁻ form 60°C (140°F)
 - Cl⁻ form 100°C (212°F)
- pH range 0 - 14
- Bed depth, min. 760 mm (2.5 ft)
- Flow rates:
 - Service/fast rinse 5 - 60 m/h (2 - 24 gpm/ft²)
 - Regeneration/displacement rinse 4 - 10 m/h (1.6 - 4 gpm/ft²)
- Total rinse requirement 3 - 5 Bed volumes
- Regenerant:
 - Type 2 - 4% NaOH

[†] For additional particle size information, please refer to Particle Size Distribution Cross Reference Chart (Form No. 177-01775)


Typical Properties and Applications

DOWEX™ MARATHON™ A LB strong base anion resin is a uniform particle size resin designed specifically for use in layered anion beds. It is sized roughly 75 microns larger than standard DOWEX MARATHON A resin. When used with DOWEX MARATHON WBA weak base anion resin, the differences in densities and size ensure the resins maintain excellent separation.

Packaging

25 liter bags or 5 cubic foot fiber drums

Figure 1. Backwash Expansion Data

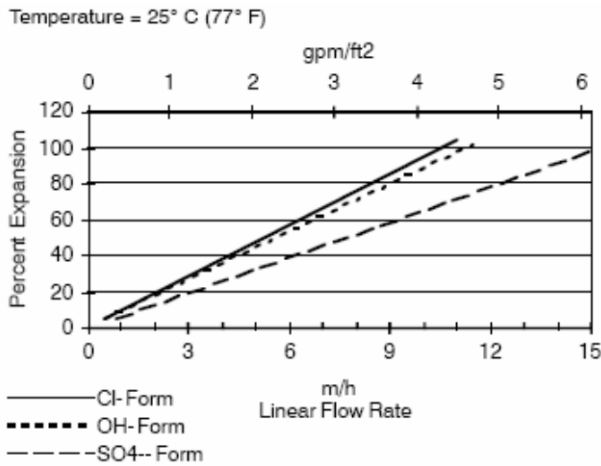


For other temperatures use:

$$F_T = F_{77°F} [1 + 0.008 (T_{°F} - 77)], \text{ where } F \equiv \text{gpm/ft}^2$$

$$F_T = F_{25°C} [1 + 0.008 (1.8T_{°C} - 45)], \text{ where } F \equiv \text{m/h}$$

Figure 2. Pressure Drop Data

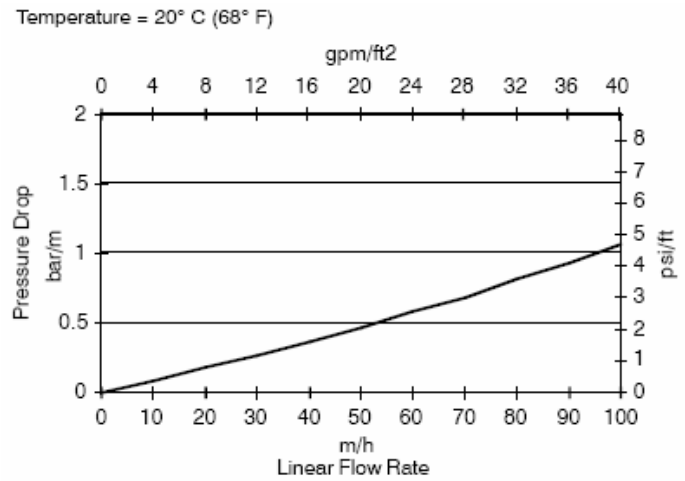

For other temperatures use:

$$P_T = P_{20°C} / (0.026 T_{°C} + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68°F} / (0.014 T_{°F} + 0.05), \text{ where } P \equiv \text{psi/ft}$$

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

