



## Fully-welded construction for high efficiency and superior sealing

Eaton's SENTINEL filter bags are suitable for a wide range of applications such as the filtration of paints and varnishes, inks, chemicals, process water and many more.

SENTINEL filter bags comply with the industry standard of a bypass-free filter bag construction. They are available in polypropylene and polyester.

### Features and benefits

- Fully-welded construction with patented SENTINEL seal ring provides 100% bypass-free filtration
- The pressure-activated SENTINEL seal ring provides a flexible, chemically resistant seal which adapts to any bag filter housing
- Material is free from silicone and crater-forming substances<sup>1</sup>
- Special surface treatment significantly reduces fiber release
- Stable and flexible welded seams that adapt to the restrainer basket

- The handles in the ring make replacing the filter bag quick and easy
- Eaton strongly recommends the use of an insertion tool that facilitates the insertion of the filter bag into the bag filter housing and ensures the correct alignment of the filter bag inside the restrainer basket

### Filter specifications

#### Materials

Needle felt polypropylene or polyester

#### Seal rings

Welded polypropylene or polyester SENTINEL seal ring

#### Retention ratings

1, 5, 10, 25, 50, 100, 200 µm

### Dimensions/Parameters

#### Sizes

- 01: Ø 7 x 17" L (180 x 430 mm)
- 02: Ø 7 x 32" L (180 x 810 mm)
- 03: Ø 4 x 9" L (100 x 230 mm)
- 04: Ø 4 x 15" L (100 x 380 mm)

#### Filter area

- 01: 2.6 ft<sup>2</sup> (0.24 m<sup>2</sup>)
- 02: 5.2 ft<sup>2</sup> (0.48 m<sup>2</sup>)
- 03: 0.9 ft<sup>2</sup> (0.08 m<sup>2</sup>)
- 04: 1.7 ft<sup>2</sup> (0.16 m<sup>2</sup>)

#### Max. operating temperatures

Polypropylene: 194 °F (90 °C)  
Polyester: 302 °F (150 °C)

#### Max. differential pressure

36.2 psi (2.5 bar)

#### Recommended change-out pressure for disposal<sup>2</sup>

11.6 – 21.7 psi (0.8 – 1.5 bar)

#### Max. flow rates<sup>3</sup>

- 01: 88 GPM (20 m<sup>3</sup>/h)
- 02: 176 GPM (40 m<sup>3</sup>/h)
- 03: 26 GPM (6 m<sup>3</sup>/h)
- 04: 53 GPM (12 m<sup>3</sup>/h)



Powering Business Worldwide

## LENNTECH

info@lennotech.com Tel. +31-152-610-900


www.lennotech.com Fax. +31-152-616-289

# SENTINEL Filter Bag Range

## Retention ratings

Materials	Codes	Retention ratings ( $\mu\text{m}$ )							Welded SENTINEL seal rings	Max. operating temperatures °F (°C)	Sizes			
		1	5	10	25	50	100	200			01	02	03	04
Polypropylene	PO	■	■	■	■	■	■	■	E	194 (90)	■	■	■	■
Polyester	PE	■	■	■	■	■	■	■	H	302 (150)	■	■	■	■

## Ordering information

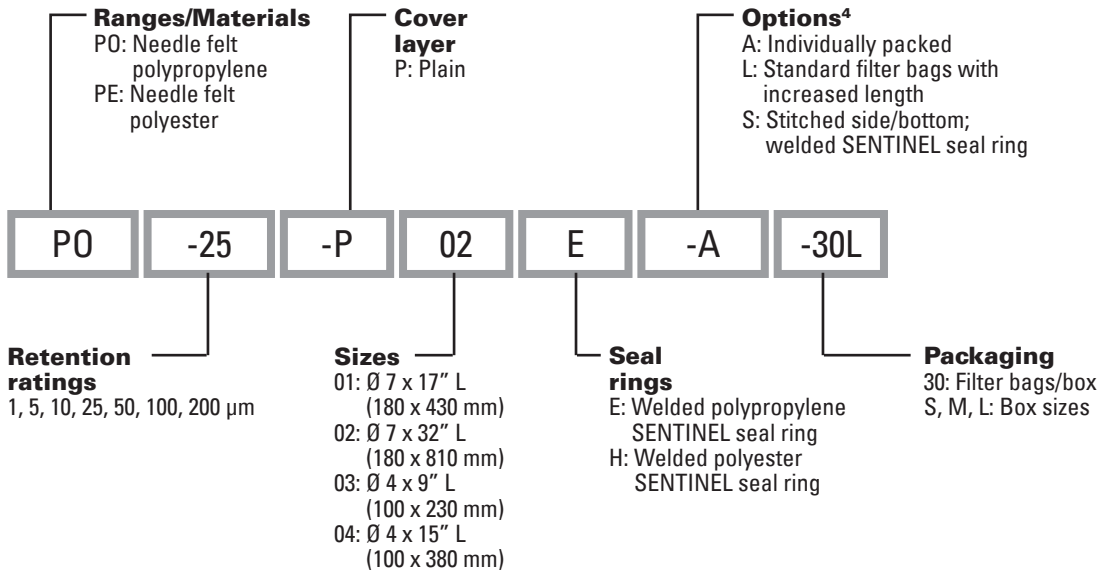

<sup>1</sup> Based on an accepted paint compatibility test (see document QUC-STA-10).

<sup>2</sup> Depending on the respective application requirements.

<sup>3</sup> For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C).

<sup>4</sup> Further options upon request (see document SAL-L-12).

# LENNTECH

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289

# EATON

Powering Business Worldwide

For more information, please email us at [info@lenntech.com](mailto:info@lenntech.com)

US  
EF-FTB-08  
08-2014

© 2014 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

