

3M Purification Inc. LifeASSURE™ EF series 0.04 µm and 0.1 µm rated cartridge filters deliver superior performance in ultra high purity water systems. Optimized cartridge filter design and further advances in 3M Purification's hydrophilic, charge modified nylon membranes are incorporated into an all polypropylene cartridge filter, yielding an efficient, ultra-retentive filtration device. 3M Purification's charge modification technology remains the most effective deterrent to contamination in ultra pure water generation. Lower pressure drops reduce operating costs and increase cartridge filter effectiveness.

All LifeASSURE EF series cartridge filters are preflushed with high purity water to minimize system recovery times at installation. Stringent manufacturing protocols in an ISO 9001:2008 certified facility are followed to provide consistent cartridge filter operation throughout the service life of the filter. End users can rely on the Scientific Applications Support Services (SASS) group which offers technical oversight for 3M Purification's large installed customer base. Unmatched cartridge filter performance and product support are the keystones of 3M Purification's commitment to the industry. Customers call on 3M Purification to be their process partner.

Features & Benefits

Charge modified nylon membrane

Mechanical and electrokinetic contaminant reduction delivers extremely low particle counts.

High flow rates — low pressure drops

New water systems can be optimized, decreasing capital costs; existing systems can deliver desired flows at lower pressure drops, resulting in lower cost of ownership.

Increased membrane area

Reduced particle loading extends filter life, curtailing downtime and operator expense.

Technical support from 3M Purification SASS personnel

Application specific engineering expertise on demand for end user issues.



The LifeASSURE™ EF series cartridge filter is durable and features all polypropylene molded components that withstand arduous operating conditions.


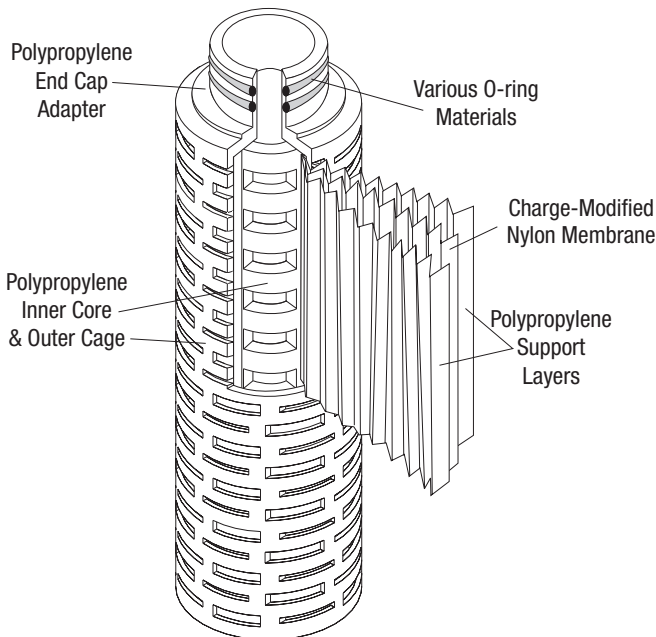


Figure 1. Water Flow Rate vs. Differential Pressure*

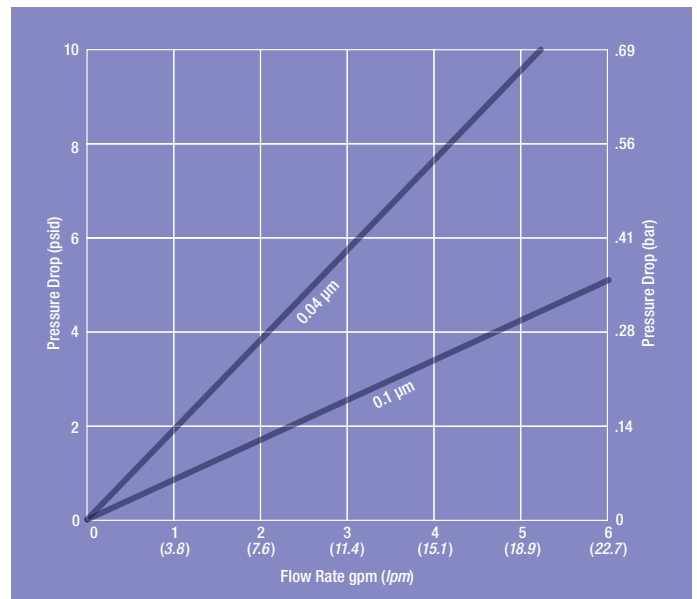

* Flow rate/pressure drop is for a 10" element in 25 °C water.

Operating Parameters & Specifications

Materials of Construction	
Membrane	Charge-Modified nylon
Membrane support layers	Polypropylene
Inner core, outer cage, end cap adapters	Polypropylene
O-rings	Fluorocarbon, silicone and PTFE-encapsulated fluorocarbon
Dimensions	
Filtration surface area	11 ft ² (1 m ²)*
Cartridge diameter (nominal)	2.75" (7 cm)
Cartridge length (nominal)	10", 20", 30" & 40"
Cartridge configurations	see ordering guide below
Operating Conditions	
Standard operating temperature	77 °F (25 °C)
Maximum forward differential pressure	60 psid (4.2 bar) @ 77 °F (25 °C)
Maximum reverse differential pressure	40 psid (2.8 bar) @ 122 °F (50 °C)
Integrity Test Values — Air Diffusion	
0.04 µm water wet cartridge	≤15 cc/min @ 45 psid (3.5 bar)
0.1 µm water wet cartridge	≤15 cc/min @ 35 psid (2.8 bar)

* per 10" element

LifeASSURE™ EF Series Cartridge Ordering Guide

Grade Designation	Configuration	Length (Inches)	End Modification	O-ring Material
EF004 (0.04 µm) EF010 (0.1 µm)	A	01 - 10 02 - 20 03 - 30 04 - 40	B - 226 Locking O-ring & spear C - 222 O-ring & spear F - 222 O-ring & flat cap	B - Fluorocarbon H - Clear silicone K - PTFE-encapsulated fluorocarbon*

* Available with C & F end modifications only.

Important Notice

The information described in this literature is accurate to the best of our knowledge. A variety of factors, however, can affect the performance of the Product(s) in a particular application, some of which are uniquely within your knowledge and control. **INFORMATION IS SUPPLIED UPON THE CONDITION THAT THE PERSONS RECEIVING THE SAME WILL MAKE THEIR OWN DETERMINATION AS TO ITS SUITABILITY FOR THEIR USE. IN NO EVENT WILL 3M PURIFICATION INC. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE WHATSOEVER RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION.**

It is your responsibility to determine if additional testing or information is required and if this product is fit for a particular purpose and suitable in your specific application.

3M PURIFICATION INC. MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS.

Limitation and Liability

3M Purification Inc. will not be liable for any loss or damage arising from the use of the Product(s), whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitation may not apply to you.



Your Local Distributor:

LENNTECH

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289

3M is a trademark of 3M Company.
LifeASSURE is a trademark of 3M Company used under license.
© 3M 2010. All rights reserved.
70-0201-8880-4 REV 1110

EF004 A 01 B B
EF004 A 01 B H
EF004 A 01 B K
EF004 A 01 C B
EF004 A 01 C H
EF004 A 01 C K
EF004 A 01 F B
EF004 A 01 F H
EF004 A 01 F K
EF004 A 02 B B
EF004 A 02 B H
EF004 A 02 B K
EF004 A 02 C B
EF004 A 02 C H
EF004 A 02 C K
EF004 A 02 F B
EF004 A 02 F H
EF004 A 02 F K
EF010 A 01 B B
EF010 A 01 B H
EF010 A 01 B K
EF010 A 01 C B
EF010 A 01 C H
EF010 A 01 C K
EF010 A 01 F B
EF010 A 01 F H
EF010 A 01 F K
EF010 A 02 B B
EF010 A 02 B H
EF010 A 02 B K
EF010 A 02 C B
EF010 A 02 C H
EF010 A 02 C K
EF010 A 02 F B
EF010 A 02 F H
EF010 A 02 F K

EF004 A 03 B B
EF004 A 03 B H
EF004 A 03 B K
EF004 A 03 C B
EF004 A 03 C H
EF004 A 03 C K
EF004 A 03 F B
EF004 A 03 F H
EF004 A 03 F K
EF004 A 04 B B
EF004 A 04 B H
EF004 A 04 B K
EF004 A 04 C B
EF004 A 04 C H
EF004 A 04 C K
EF004 A 04 F B
EF004 A 04 F H
EF004 A 04 F K
EF004 A 03 B B
EF010 A 03 B H
EF010 A 03 B K
EF010 A 03 C B
EF010 A 03 C H
EF010 A 03 C K
EF010 A 03 F B
EF010 A 03 F H
EF010 A 03 F K
EF010 A 04 B B
EF010 A 04 B H
EF010 A 04 B K
EF010 A 04 C B
EF010 A 04 C H
EF010 A 04 C K
EF010 A 04 F B
EF010 A 04 F H
EF010 A 04 F K