

DIAION™ UBA1200H

DIAION™ UBA1200H is an anion exchange resin with a uniform particle size. It has a standard cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water, is recommended.

Product

Grade Name	DIAION™ UBA1200H	
Type	Strong Base Anion	
Matrix	Styrene-DVB, Gel	
Functional Group	Type I (trimethyl ammonium groups)	
Ionic Form	OH ⁻	

Specification

Whole Bead Count	-	90 min.
Salt Splitting Capacity	meq/mL	1.0 min.
Water Content	%	62 - 70
Average Diameter	μm	620 ± 50
Uniformity Coefficient	-	1.10 max.
Ionic Conversion (OH ⁻)	%	90 min.

Typical Properties

Shipping Density	g/mL	675
Particle Density	g/mL	1.07
Total Swelling (Cl ⁻ to OH ⁻)	%	24

Recommended Operating Conditions

Maximum Operating Temperature	°C	80 (Cl ⁻) 60 (OH ⁻)
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 60
Regenerant		NaOH
Regenerant Concentration	%	NaOH 2 - 8
Regenerant Level	g/L	50 - 200
Regenerant Flow Rate	m/h	2 - 8
Total Rinse Requirement	BV	2 - 10



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBA1200H resin in normal down flow operation is shown in the graphs below.

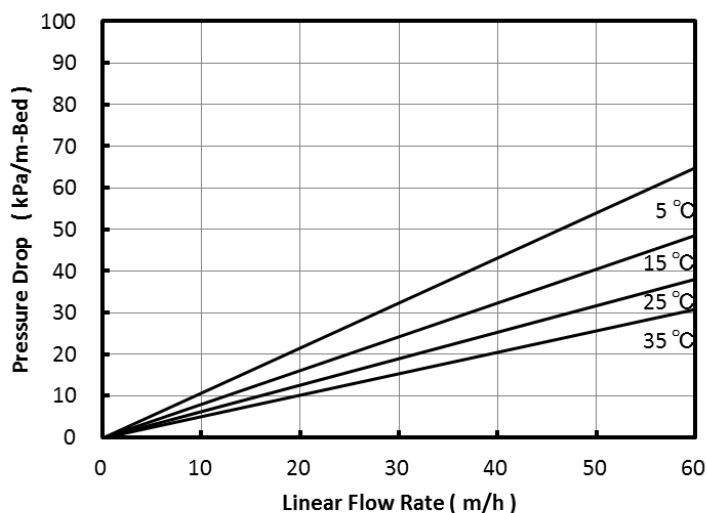


Fig. 1 Pressure Drop of UBA1200H

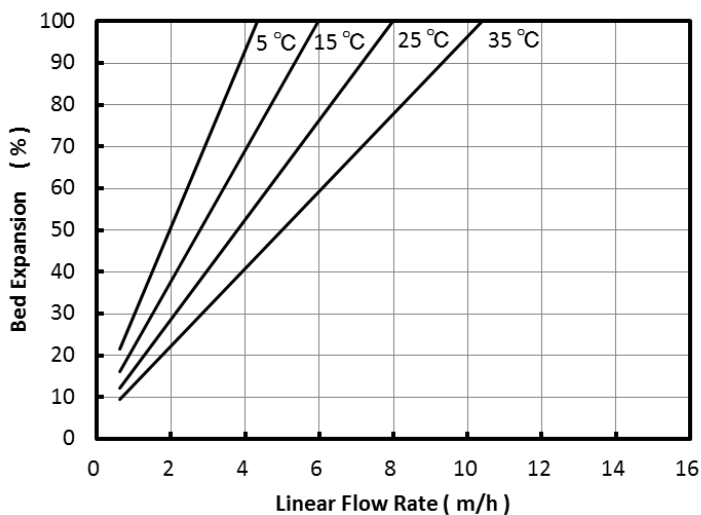


Fig. 2 Bed Expansion of UBA1200H

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

No.01-04-A-0401