

CLARIFLOW G Filter Cartridges

- liquid filters
- polyethersulphone




CLARIFLOW General Grade cartridges are designed for general purpose use in the filtration of high-purity liquids. The mirrored anisotropic Polyethersulfone (PES) membrane is inherently hydrophilic and has a pore morphology that delivers exceptionally high flow rates.

Because there are no added surfactants or wetting agents, and the support layers and structure are all Polypropylene, the filter exhibits low extractables, broad chemical compatibility and good resistance to hydrolysis.

Features and Benefits

- Broad chemical compatibility allows use in most applications
- Low differential pressure reduces system wear and tear
- Thermally bonded construction minimises extractables for cleaner filtrates

Performance Characteristics

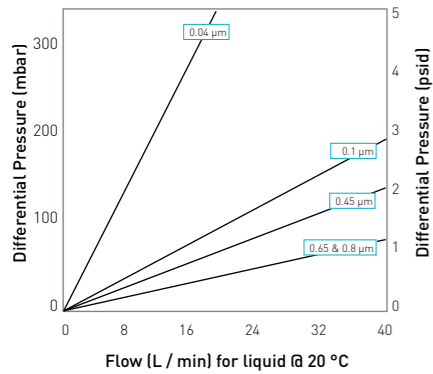

10" Size (250 mm) Cartridge

CLARIFLOW G Filter Cartridges

Specifications

Materials of Construction

- Filtration Membrane: Polyethersulfone (PES)
- Support Layers: Polypropylene
- Inner Support Core: Polypropylene
- Outer Protection Cage: Polypropylene
- Standard o-rings: EPDM / gaskets

Recommended Operating Conditions

Temperature °C	Temperature °F	Max. Forward dP (barg)	Max. Forward dP (psid)
24	75	5.5	80
82	180	2.8	40

Temperature °C	Temperature °F	Max. Reverse dP (barg)	Max. Reverse dP (psid)
24	75	3.4	50


Effective Filtration Area

0.63 m² (6.8 ft²) per 10 inch (250 mm) cartridge

Applications

- Water filtration
- High purity liquids
- Aqueous chemicals
- Deionized water systems

Ordering Information



Code End Fitting	Code Length (Nominal)	Code Filter Rating	Code Gasket o-rings	Code Gasket Thickness
0 DOE (Cuno®)	10 10" (250 mm)	924 0.04	0 Buna N	DOE only
1 DOE	20 20" (500 mm)	001 0.1	1 EPDM (standard)	1 0.20" (5 mm)
2 Flat / 226	30 30" (750 mm)	002 0.2	2 Silicone	2 1.25" (3 mm)
3 Flat / 222	40 40" (1000 mm)	004 0.45	4 Viton	4 0.2" (5 mm) (1) & 0.125" (3 mm) (1)
6 Flat / 020 Internal		006 0.65	5* FEP-Encapsulated Viton	N No gasket
7 Fin / 226		008 0.8	6* FEP-Encapsulated Silicone	
8 Fin / 222			N None	

Minimum Box Quantity	
10"	28
20"	12
30"	12
40"	9

* o-rings only

LENNTECH bv

info@lenntech.com
www.lenntech.com
Tel. +31-15-261.09.00
Fax. +31-15-261.62.89

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.