

## INDUSTRIAL TEFLEX SERIES

### BETA 5000/ABSOLUTE-RATED PTFE MEMBRANE CARTRIDGES



The Teflex Absolute-rated PTFE Membrane Cartridges provide an economical solution where PTFE membrane cartridges are desired. Teflex cartridges combine polypropylene with polytetrafluoro-ethylene for electronics, food and beverage, and general purpose applications. The endcaps, center cores and outer support cages are constructed of polypropylene for increased durability.

#### FEATURES/BENEFITS

PTFE membrane for full particle retention  
 Reduces particles as small as 0.1 micron in size by mechanical means\*  
 Efficiency rating exceeds 99.98% (beta 5000)  
 Polypropylene center core and outer support cage for increased durability  
 Available in 10", 20", 30" and 40" (254, 508, 762, 1,016 mm) lengths with a nominal outside diameter of 2.70" (69 mm)

Manufactured from FDA-listed materials  
 Meets USP Class IV biological test for plastics  
 Multiple endcap configurations and O-ring materials available

\* Not intended for the removal of microbial pests including virus, bacteria and cysts.

#### APPLICATIONS

Chemicals  
 Deionized Water Systems  
 Electronics  
 Food & Beverage  
 General Use Water  
 Industrial  
 Post-filter RO Systems

#### CARTRIDGE SPECIFICATIONS

Filter Media	Polypropylene/ Polytetrafluoroethylene
Supports	Polypropylene
Max. Temp. Rating	176 °F (80 °C)
Max. Differential Pressure	50 PSID (3.4 bar) forward 40 PSID (2.8 bar) reverse

## LIQUID FLOW SPECIFICATIONS

RATING (μ)	DI WATER FLOW
0.1	1.25 GPM (4.7 Lpm)
0.2	2.8 GPM (10.6 Lpm)
0.45	5.7 GPM (21.5 Lpm)

## CASE QUANTITY


All sizes: 6 per case

## ORDERING INFORMATION

To create your ordering part number, use the part number configurator below.  
 Custom configurations available. Please contact customer service.

### EXAMPLE: PTFE0.1-10CPPPDB

Teflex Absolute PTFE Membrane Filter Cartridge (PTFE)  
 0.1-absolute micron rating (0.1), 10" length (10), 2.70" diameter (C), Polypropylene core (P)  
 Polypropylene endcaps (P), Polypropylene outer sleeve (P), Double-open-ended (D), Buna-N seal (B)

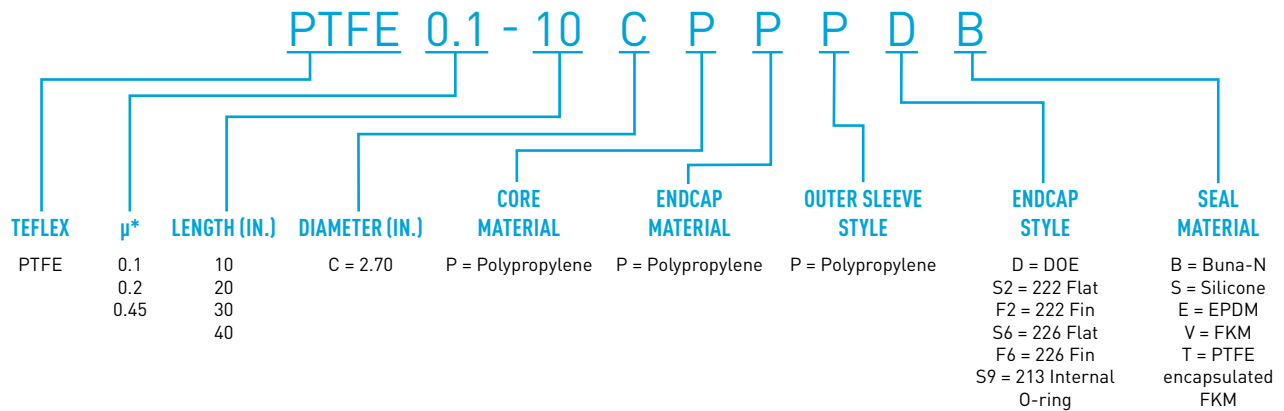

\*absolute/ beta 5000

\*Not intended for the removal of microbial pests including virus, bacteria and cysts.



FILTRATION & PROCESS

# LENNTECH

info@lennotech.com Tel. +31-152-610-900  
 www.lennotech.com Fax. +31-152-616-289

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

4003009 Rev D NV14 © 2014 Pentair Residential Filtration, LLC. All rights reserved.