

INDUSTRIAL MHP SERIES

MAXIMUM HIGH PERFORMANCE LIQUID FILTER BAGS



MHP Series Filter Bags have been tested under true filtering conditions to perform in the most demanding applications. If you need a maximum performance bag, the MHP Series offers you 96% to 99% efficiency at 2 to 35 microns or greater, depending on model.

FEATURES/BENEFITS

Multi-layer graded density depth filtration

42 ft² (3.9 m²) of filtration media

Maximum dirt-loading and efficiency rating

Independent lab tested

Fits into any standard size metal ring #2-size housing

Polypropylene media construction

Fiber-free cover

Silicone-free

Heavy-duty Stainless Steel ring

Low initial pressure drop

Packaged two per carton

APPLICATIONS

Commercial process fluids

Industrial process fluids

AVERAGE PERCENT EFFICIENCY RATING

PART NUMBER	MICRON SIZE													
	.5 - 1	1 - 1.5	1.5 - 2	2 - 3	3 - 4	5 - 6	6 - 8	8 - 10	10 - 12	12 - 15	15 - 20	20 - 25	25 - 35	35+
MHP2.5ML2SS	80.2%	93.4%	95.7%	96.3%	97.2%									
MHP08ML2SS						99.7%	99.8%	99.9%	99.9%>	99.9%>	99.9%>			
MHP15ML2SS							55.75%	76.3%	90.65%		99.0%>	99.0%>	99.0%>	
MHP35ML2SS									94.4%	95.4%	98.5%	99.8%>	99.0%>	99.0%>

MEDIA SPECIFICATIONS

PART NUMBER	MATERIAL	MAXIMUM TEMPERATURE	FLOW RATE	INITIAL PSID	MAXIMUM PSID	SUGGESTED CHANGE	SIZE
MHP2.5ML2SS	Polypropylene	190° F (88° C)	2.5 gpm (10 Lpm)	0.6 (0.04 bar)	30 (1.4 bar)	20 PSID (1.4 bar)	7.125" x 32" (181 x 813 mm) Standard Trade Size #2
MHP08ML2SS			25 gpm (95 Lpm)	1.5 (0.10 bar)	45 (1.7 bar)	25 PSID (1.7 bar)	
MHP15ML2SS				1.8 (0.12 bar)			
MHP35ML2SS				1.2 (0.08 bar)			

TEST DATA

Micron Efficiency Rating/ASTM F795-88





PART NUMBER	FLUID TYPE	FLOW RATE	TEMPERATURE	INITIAL
MHP2.5ML2SS	Water	2.5 gpm (10 Lpm)	Ambient	0.6 PSID (0.04 bar)
MHP08ML2SS				1.5 PSID (0.10 bar)
MHP15ML2SS		25 gpm (95 Lpm)		1.8 PSID (0.12 bar)
MHP35ML2SS				1.2 PSID (0.08 bar)

Gram Loading Test (Per Modified Multi-Pass ASTM F797)

PART NUMBER	FLUID TYPE	TEMPERATURE	NET CAPACITY
MHP2.5ML2SS	Water	Ambient	1844 grams
MHP08ML2SS			788 grams
MHP15ML2SS			1758 grams
MHP35ML2SS			1007 grams

Note: case quantity 2

MHP Series Efficiency

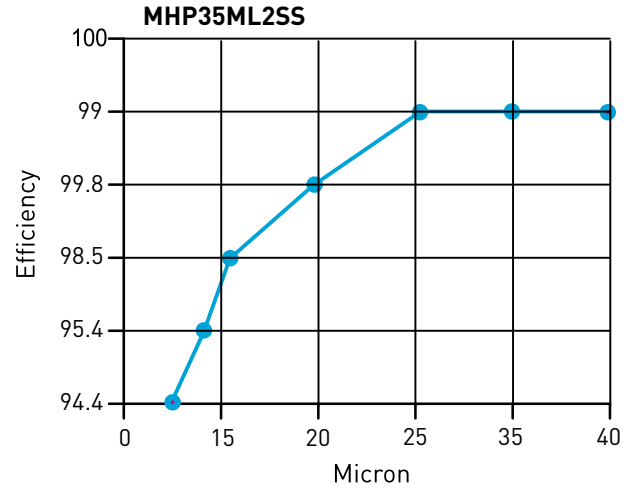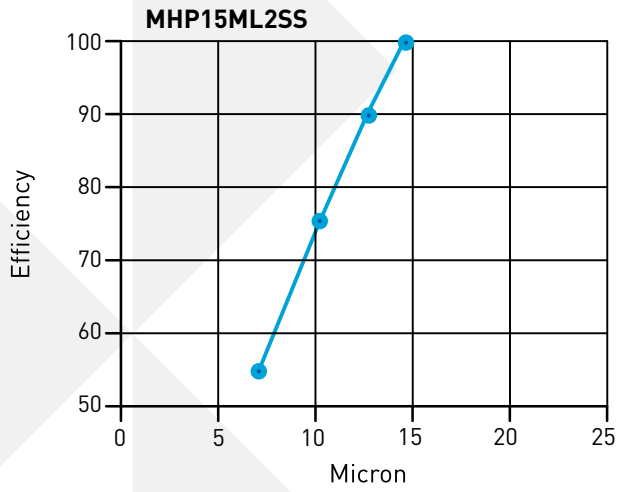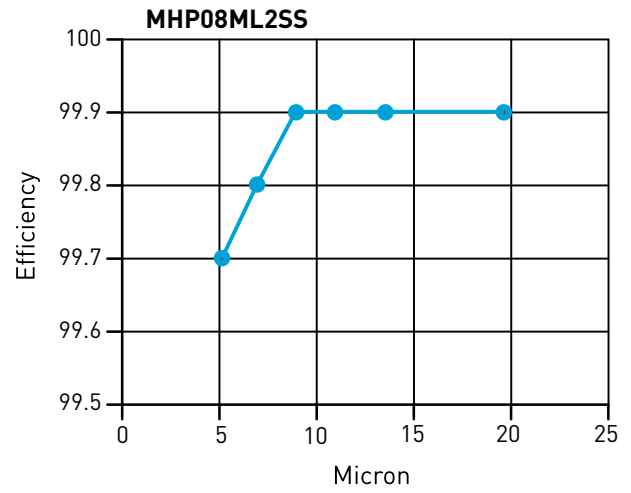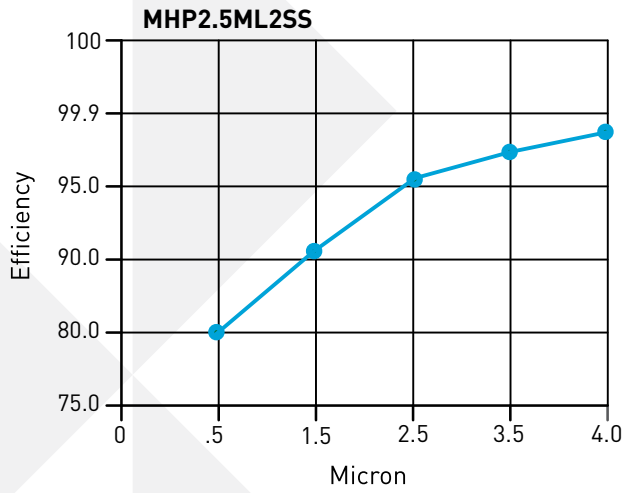



FILTRATION & PROCESS

LENNTECH

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

4003016 Rev D DE14 © 2014 Pentair Residential Filtration, LLC. All rights reserved.