


LENNTECH

info@lenntech.com

www.lenntech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89

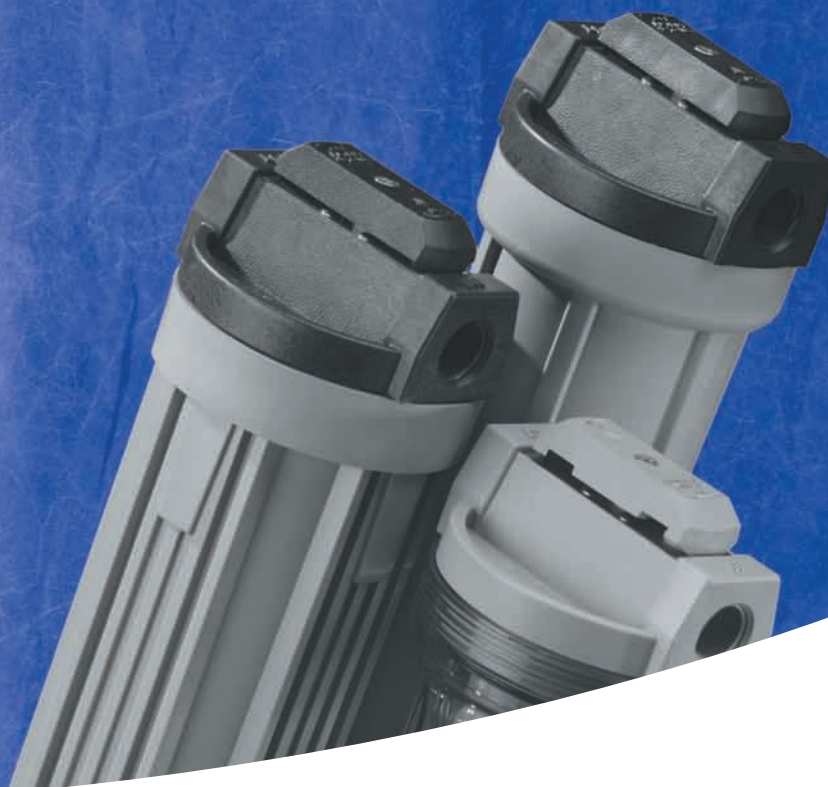

#20 Opaque
VIH

#10 Clear
VIH

#10 Opaque
VIH

VALVE-IN-HEAD FILTER HOUSINGS

- Ideal for a wide range of applications, including residential, commercial and industrial
- Available in 10" and 20" lengths
- Pressure-relief/bleed button on inlet side of cap
- Thick walls for increased strength
- Leak-proof sealing with top-seated Buna-N o-ring
- Available with clear or opaque sumps

Valve-in-head (VIH) filter housings incorporate the same rugged design and application features as our Standard 3/4" NPT housings.

The internal valve-in-head allows both inlet and outlet ports to be simultaneously shut-off with a half turn of the handle. This eliminates the need for external shut-off valves. Radial sealing o-rings and sealing surfaces are continuously cleaned each time the valve is used, ensuring leak-proof operation.

Valve-in-head filter housings are available in both 10" and 20" lengths, and will accommodate a wide range of 2 3/8" to 2 7/8" diameter cartridges. The polypropylene caps feature pressure-relief button on the

inlet side to relieve pressure inside the housing when changing filter cartridges.

Opaque Valve-In-Head Filter Housings are molded from rugged reinforced polypropylene, Opaque Valve-In-Head filter housings offer outstanding chemical compatibility and are ideal for use in a variety of low-flow applications. These applications include under-sink and countertop residential filtration, pre- and post-reverse osmosis filtration, recreational vehicle filtration, food service and humidifying systems.

Clear Valve-In-Head Filter Housings offer on-site examination of flow, performance, and cartridge life.

They are also ideal for a variety of applications.


Manufactured of clear, FDA-compliant Styrene-Acrylonitrile (SAN), the sumps are annealed to relieve stress, adding clarity and strength.



PENTEK
Pentair Water

VALVE-IN-HEAD

Filter Housings

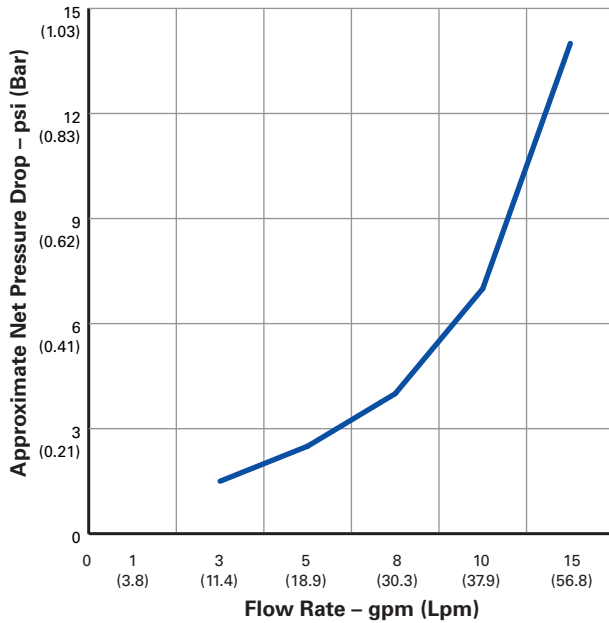

The 150164 and 150172 are Tested and Certified by NSF International to NSF/ANSI Standard 42 for material and structural integrity requirements.

Housing Specifications and Performance Data

Model	Maximum Dimensions	Initial ΔP (psi) @ Flow Rate (gpm)
#10 VIH	12½" x 5⅛" (318 mm x 130 mm)	4 psi @ 8 gpm (0.3 bar @ 30 Lpm)
#10 VIH Clear	12⅞" x 5¼" (327 mm x 133 mm)	4 psi @ 8 gpm (0.3 bar @ 30 Lpm)
#20 VIH	22⅞" x 5⅞" (575 mm x 130 mm)	4 psi @ 8 gpm (0.3 bar @ 30 Lpm)

Materials of Construction

Housing	Polypropylene (Opaque) or Styrene Acrylonitrile (Clear)
Cap	Reinforced Polypropylene
Button Assembly	300-series Stainless Steel, EPDM, and Polypropylene
Valve Parts	Delrin
O-Ring	Buna-N
Maximum Temperature	125°F (51.7°C)
Maximum Pressure	125 psi (8.62 bar)

CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.

LENNTECH bv

Rotterdamseweg 402m
 2629HH Delft
 The Netherlands
 info@lennotech.com
 www.lennotech.com
 Tel. +31-15-261.09.00
 Fax. +31-15-261.62.89

