


Reducing Coupling

STYLE 750



Exaggerated for clarity

The Style 750 Reducing Coupling permits direct reduction on the piping run. Designed to replace two couplings and a reducing fitting, the Style 750 features a special reducing gasket for pressure responsive sealing. A steel washer which prevents telescoping of the smaller pipe inside the larger pipe during vertical systems assembly is available upon request.

LENNTECH

info@lenntech.com

www.lenntech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89

MATERIAL SPECIFICATIONS

Housing: Ductile iron conforming to ASTM A-536, grade 65-45-12. Ductile iron conforming to ASTM A-395, grade 65-45-15, is available upon special request.

Housing Coating: Orange enamel

- **Optional:** Hot dipped galvanized and others

Gasket: (Specify choice*):

- **Grade "E" EPDM (All other sizes)**
EPDM (Green color code). Temperature range -30°F to +230°F/-34°C to +110°C. Recommended for cold and hot water service within the specified temperature range plus a variety of dilute acids, oil-free air and many chemical services. UL classified in accordance with ANSI/NSF 61 for cold +86°F/+30°C and hot +180°F/+82°C potable water service. NOT RECOMMENDED FOR PETROLEUM SERVICES.
- **Grade "T" nitrile**
Nitrile (Orange color code). Temperature range -20°F to +180°F/-29°C to +82°C. Recommended for petroleum products, air with oil vapors, vegetable and mineral oils within the specified temperature range. Not recommended for hot water services over +150°F/+66°C or for hot dry air over +140°F/+60°C.

* Services listed are General Service Recommendations only. It should be noted that there are services for which these gaskets are not recommended. Reference should always be made to the latest Victaulic Gasket Selection Guide for specific gasket service recommendations and for a listing of services which are not recommended.

- **Optional:** Assembly Washer: Galvanized, carbon steel

Bolts/Nuts: Heat-treated plated carbon steel, trackhead meeting the physical and chemical requirements of ASTM A-449 and physical requirements of ASTM A-183.

JOB/OWNER

System No. _____

Location _____

CONTRACTOR

Submitted By _____

Date _____

ENGINEER

Spec Sect _____ Para _____

Approved _____

Date _____

www.victaulic.com

VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2007 VICTAULIC COMPANY. ALL RIGHTS RESERVED. PRINTED IN THE USA.

REV_I



Reducing Coupling

STYLE 750

DIMENSIONS

Size		Max. Work Pressure *	Max. End Load *	Allow. Pipe End Sep. †	Deflect. Fr. C ₁ †		Bolt/Nut@ No - Size	Dimensions – Inches/mm			Approx. Wgt. Each	
Nominal Size Inches/mm	X	psi kPa	Lbs. N	Inches/ mm	Per Cplg. Deg.	Pipe In./Ft. mm/m	Inches	X	Y	Z	Lbs. kg	
2 50	X	1 25	350 2410	500 2225	0 – 0.07 0 – 1.8	0° – 57°	0.20 17	2 – 3/8 x 2	3.38 85	5.28 134	1.88 48	2.7 1.2
		1 1/2 40	350 2410	1000 4450	0 – 0.07 0 – 1.8	0° – 57°	0.20 17		2 – 3/8 x 2	3.38 85	5.28 134	1.88 48
2 1/2 65	X	2 50	500 3450	2215 9850	0 – 0.07 0 – 1.8	0° – 47°	0.16 14	2 – 3/8 x 2	4.00 102	5.93 151	1.88 48	3.1 1.4
76.1 mm	X	2 50	350 2410	1550 6900	0 – 0.07 0 – 1.8	0° – 47°	0.16 14	2 – 1/2 x 2 3/4	4.38 111	6.63 168	1.88 48	4.6 2.1
3 80	X	2 50	350 2410	1550 6900	0 – 0.07 0 – 1.8	0° – 39°	0.13 11	2 – 1/2 x 2 3/4	4.75 121	7.13 181	1.88 48	4.9 2.2
		2 1/2 65	500 3450	3250 14460	0 – 0.07 0 – 1.8	0° – 39°	0.13 11		4.75 121	7.13 181	1.88 48	4.3 2.0
88.9 mm	X	76.1 mm	350 2410	2275 10125	0 – 0.07 0 – 1.8	0° – 39°	0.13 11	2 – 1/2 x 2 3/4	4.75 121	7.13 181	1.88 48	4.2 1.9
4 100	X	2 50	350 2410	1550 6900	0 – 0.13 0 – 3.2	1° – 19°	0.28 25	2 – 5/8 x 3 1/4	6.25 159	8.90 226	2.25 57	8.1 3.7
		2 1/2 65	350 2410	2275 10125	0 – 0.13 0 – 3.2	1° – 19°	0.28 25	2 – 5/8 x 3 1/4	6.25 159	8.90 226	2.25 57	8.6 3.9
		3 80	500 3450	4810 21400	0 – 0.13 0 – 3.2	1° – 19°	0.28 25	2 – 5/8 x 3 1/4	6.00 152	8.90 226	2.25 57	6.7 3.0
114.3 mm	X	76.1 mm	350 2410	2475 11014	0 – 0.13 0 – 3.2	1° – 19°	0.28 25	2 – 5/8 x 3 1/4	6.25 159	8.90 226	2.25 57	6.9 3.1
5 125	X	4 100	350 2410	5565 24765	0 – 0.13 0 – 3.2	1° – 3°	0.22 19	2 – 3/4 x 4 1/4	7.18 182	10.70 272	2.13 54	11.2 5.1
6 150	X	4 100	350 2410	5565 24765	0 – 0.13 0 – 3.2	0° – 52°	0.18 15	2 – 3/4 x 4 1/4	8.63 181	11.90 302	2.25 57	16.7 7.6
		5 125	350 2410	8500 37825	0 – 0.13 0 – 3.2	0° – 52°	0.18 15		8.31 211	11.90 302	2.25 57	12.9 5.9
165.1 mm	X	4 100	350 2410	5565 24765	0 – 0.13 0 – 3.2	0° – 55°	0.19 16	2 – 3/4 x 4 1/4	8.63 219	11.90 302	2.25 57	15.2 6.9
8 200	X	6 150	350 2410	12000 53400	0 – 0.13 0 – 3.2	0° – 38°	0.13 11	2 – 7/8 x 5	10.81 275	14.88 378	2.50 64	22.4 10.2
		219.1 mm	X	165.1 mm	350 2410	1625	0 – 0.13 0 – 3.2		0° – 38°	0.13 11	10.75 273	14.88 378
10 273	X	8 219.1	350 2410	20450	0 – 0.13 0 – 3.2	0° – 25°	0.9 8	2 – 1 x 5 1/2	13.12 333	17.26 438	2.62 67	31.4 14.2

Style 750 Reducing couplings should not be used with end caps (#60) in systems where a vacuum may be developed. Contact Victaulic for details.

* Working Pressure and End Load are total, from all internal and external loads, based on standard weight (ANSI) steel pipe, standard **roll** or **cut** grooved in accordance with Victaulic specifications. Contact Victaulic for performance on other pipe. Maximum working pressure rating based on larger pipe size. Maximum End Load rating based on smaller pipe size. WARNING: FOR ONE TIME FIELD TEST ONLY, the Maximum Joint Working Pressure may be increased to 1 1/2 times the figures shown.

† Allowable Pipe End Separation and Deflection figures show the maximum nominal range of movement available at each joint for standard **roll** grooved pipe. Figures for standard **cut** grooved pipe may be doubled. These figures are maximums; for design and installation purposes these figures should be reduced by: 50% for 3/4 – 3 1/2"/20 – 90 mm; 25% for 4"/100 mm and larger.

@ Number of bolts required equals number of housing segments.

Metric thread size bolts are available (color coded gold) for all coupling sizes upon request. Contact Victaulic for details.

WARNING: Depressurize and drain the piping system before attempting to install, remove, or adjust any Victaulic piping products.


LENNTECH

info@lennotech.com

www.lennotech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89

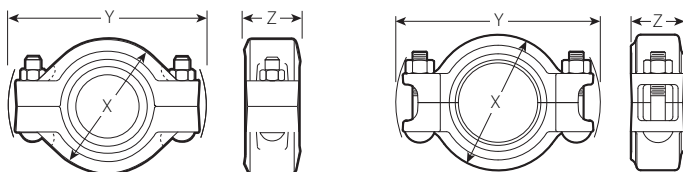

Reducing Coupling

STYLE 750

FLOW DATA

HEAD LOSS

The head loss across Style 750 Reducing coupling is very small and is essentially the same as for standard short body reducing pipe fittings.

Equivalent lengths of standard weight steel pipe are shown in the tables. All data is based on water flowing at ambient temperature.

FLOW REDUCING

Size		Equiv. Pipe Length	
Nominal Size Inches/mm		Sm. Dia. Feet/m	
2 50	× 1 25	5.9 1.8	
		1½ 40	2.0 0.6
2½ 65	× 2 50	1.9 0.6	
		76.1 mm × 2 50	1.9 0.6
3 80	× 2 50	5.5 1.7	
		2½ 65	3.8 1.2
88.9 mm × 76.1 mm		3.8 1.2	
4 100	× 2 50	6.0 1.8	
		2½ 65	6.0 1.8
		3 80	6.0 1.8
114.3 mm × 76.1 mm		6.0 1.8	
5 125	× 4 100	3.0 0.9	
		6 150	6.0 1.8
6 150	× 4 100	6.0 1.8	
		5 125	4.5 1.4
165.1 mm × 100		6.0 1.8	
8 200	× 6 150	7.3 2.2	
		219.1 mm × 165.1 mm	7.3 2.23
10 273	× 8 219.1	8.7 2.65	

FLOW EXPANDING

Size		Equiv. Pipe Length	
Nominal Size Inches/mm		Sm. Dia. Feet/m	
1 25	× 2 50	2.7 0.8	
		1½ 40	1.9 0.6
2 50	× 2½ 65	1.0 0.3	
		76.1 mm	1.0 0.3
3 80	× 3 80	3.5 1.1	
		4 100	3.0 0.9
		2½ 65 × 3 80	2.5 0.8
76.1 mm × 88.9 mm		4 100	3.0 0.9
		114.3 mm	2.5 0.8
3 80 × 4 100		3.0 0.9	
4 100	× 5 125	2.5 0.8	
		6 150	4.6 1.4
5 125	× 6 150	4.6 1.4	
		165.1 mm	4.6 1.4
5 125 × 6 150		2.3 0.7	
6 150	× 8 200	6.0 1.8	
		165.1 mm × 219.1 mm	5.4 1.65
8 219.1	× 10 273	6.3 1.92	

LENNTECH

info@lenntech.com

www.lenntech.com

Tel. +31-15-261.09.00

Fax. +31-15-261.62.89

Reducing Coupling

STYLE 750

INSTALLATION

Reference should always be made to the I-100 Victaulic Field Installation Handbook for the product you are installing. Handbooks are included with each shipment of Victaulic products for complete installation and assembly data, and are available in PDF format on our website at www.victaulic.com.

WARRANTY

Refer to the Warranty section of the current Price List or contact Victaulic for details.

NOTE

This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

LENNTECH**info@lennotech.com****www.lennotech.com****Tel. +31-15-261.09.00****Fax. +31-15-261.62.89**

WCAS-6UPKD7

For complete contact information, visit www.victaulic.com

06.08 1536 REV I UPDATED 6/2008

VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2007 VICTAULIC COMPANY. ALL RIGHTS RESERVED. PRINTED IN THE USA.

06.08

