



# PRODUCT SPECIFICATION

**LENNTECH**

info@lennotech.com  
 www.lennotech.com  
 Tel. +31-152-610-900  
 Fax +31-152-616-289


## 4" UA60 Ultrafiltration Element Series

Model	Permeate flow GPD (m3/day)*	M.W.C.O.
4040-UA60-TSA	2,500 (9.0)	3,500

Performance is based on the following test conditions: 2,000.00 ppm MgSO4, 110.00 psi, 25°C, 15% recovery, pH 8.00, 30 minutes operation.

### OPERATIONAL AND DESIGN DATA

Membrane Type.....	UA60 Polyamide Advanced Ultrafiltration Membrane
Configuration.....	Spiral Wound, Fiberglass Outer Wrap
Active Membrane Area.....	88 ft <sup>2</sup> (8.2 m <sup>2</sup> )
Recommended Applied Pressure.....	40 - 200 psi (3 - 14 bar)
Maximum Applied Pressure.....	600 psi (41 bar)
Recommended Operating Temperature.....	35 - 113°F (2 - 45°C)
Feedwater pH Range.....	2 - 11 continuous
Chlorine Tolerance.....	0.5 ppm nominal, 1.0 ppm max
Maximum Feed Flow.....	20 GPM (4.5 m3/hr)
Minimum Brine Flow/Permeate Flow Ratio....	5:1
Maximum SDI ( 15 minutes) .....	5.0
Maximum Turbidity.....	2 NTU

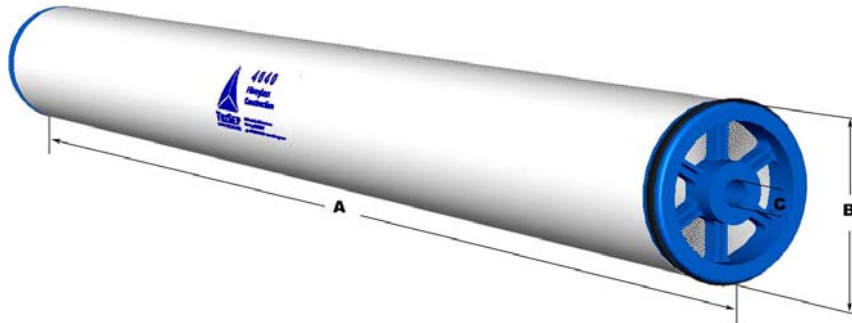

Element Weight : 15 (7)  
 Length (A) : 40.00 (1,016)    Diameter (B) : 4.0 (101)    Permeate Tube (C) : 0.75 (19.1)  
 Units in pounds and inches, units in paranthesis in kilograms and millimetres.  
 Mechanical Configuration: TriSep Style Core Tube  
 Feed Spacer: 0.031" thick diamond spacer

\* Permeate flow is clean water flux at standard conditions above. Not applicable for all feedwater conditions. Individual element's permeate flow may vary +/- 15%.



**Engineered Membrane**  
**SOLUTIONS**