



# PRODUCT SPECIFICATION

**LENNTECH**

info@lennotech.com  
 www.lennotech.com  
 Tel. +31-152-610-900  
 Fax +31-152-616-289


## 4" AUM Ultrafiltration Element Series

Model	Permeate flow GPD (m3/day)*	M.W.C.O.
4040-UE50-QSF	4,400 (16.0)	100,000

Performance is based on the following test conditions: 500.0 ppm Dextran, 30.0 psi, 25°C, 15% recovery, pH 8.0, 30 minutes operation.

### OPERATIONAL AND DESIGN DATA

Membrane Type.....	AUM Advanced Ultrafiltration Membrane
Configuration.....	Spiral Wound, Fiberglass Outer Wrap
Active Membrane Area.....	80 ft <sup>2</sup> (7.3 m <sup>2</sup> )
Recommended Applied Pressure.....	20 - 200 psi (1.4 - 14 bar)
Maximum Applied Pressure.....	600 psi (41 bar)
Recommended Operating Temperature.....	35 - 113°F (2 - 45°C)
Feedwater pH Range.....	2 - 11 continuous
Chlorine Tolerance.....	10.0 ppm
Maximum Feed Flow.....	20 GPM (4.5 m <sup>3</sup> /hr)
Minimum Brine Flow/Permeate Flow Ratio....	5:1
Maximum SDI ( 15 minutes) .....	5.0
Maximum Turbidity.....	1 NTU

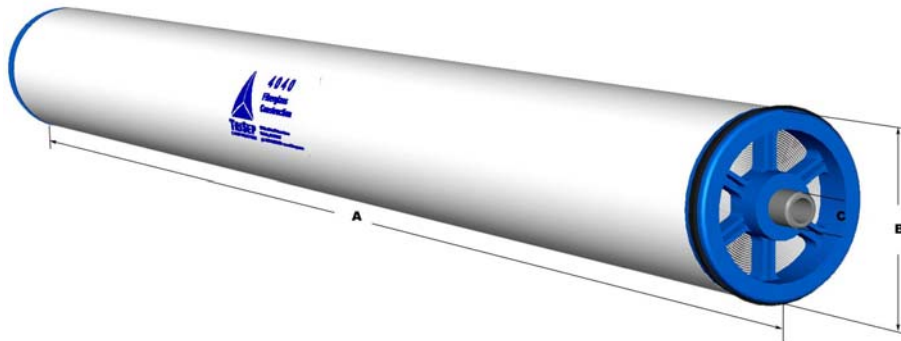

Element Weight : 15 (7)  
 Length (A) : 40.0 (1,016)    Diameter (B) : 4.0 (101)    Permeate Tube (C) : 0.75 (19.1)  
 Units in pounds and inches, units in paranthesis in kilograms and millimetres.  
 Mechanical Configuration: Filmtec Style Core Tube  
 Feed Spacer: 0.031" thick diamond spacer

\* Permeate flow is clean water flux at standard conditions above. Not applicable for all feedwater conditions. Individual element's permeate flow may vary +/- 15%.



**Engineered Membrane**  
**SOLUTIONS**

**LENNTECH**

info@lennotech.com Tel. +31-152-610-900  
 www.lennotech.com Fax +31-152-616-289