



PRODUCT SPECIFICATION


Heat-Sanitizable UF TurboClean® Element For Dialysis and High-Purity Applications

Model	Permeate Flow*	Nominal M.W.C.O.
TurboClean® HP 4040-UF-HS-F	2,800 GPD (10.6 m³/d)	10,000

* Performance shown follows heat sanitization and is based on the following test conditions: 500 ppm PEG, 30 psi, 77°F (25°C), 15% recovery, pH 8.0, 30 minutes operation.
Individual element permeate flow may vary +/- 15%.

OPERATIONAL AND DESIGN DATA

Membrane Type	AUM Advanced Ultrafiltration Membrane
Configuration	Spiral Wound, Sanitary Style Element
Active Membrane Area	78 ft² (7.2 m²)
Typical Applied Pressure.....	25 - 100 psi (2 - 7 bar)
Maximum Applied Pressure	600 psi (41 bar)
Maximum Operating Temperature.....	113°F (45°C)
Maximum Sanitization Temperature.....	185°F (85°C) @ 25 psi maximum pressure
Feed pH Range	2 - 11 continuous
Chlorine Tolerance	10 ppm
Maximum Feed Flow	20 GPM (4.5 m³/hr)
Maximum Pressure Drop	15 psi (1 bar) per element; 60 psi (4 bar) across housing
Maximum Feed SDI (15 minutes).....	5.0
Maximum Feed Turbidity	1 NTU
Application	High Purity Water

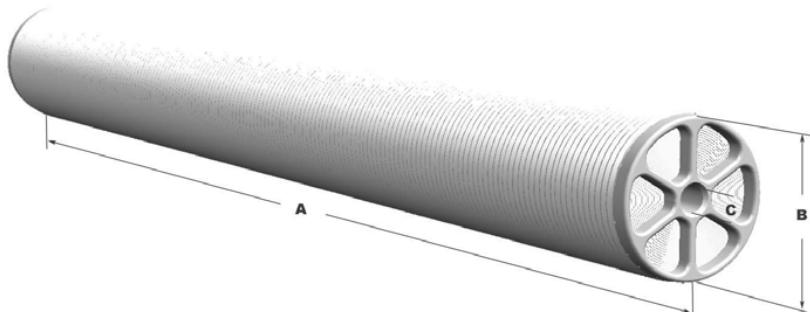

Element Weight: 15 lbs. (7 kg)

Length (A): 40.0" (1,016 mm) Diameter (B): 4.0" (101 mm) Permeate Tube (C): 0.62" (15.9 mm)

Permeate Tube: Desal Style tube

Feed Spacer: 0.031" thick diamond spacer



Engineered Membrane
SOLUTIONS

LENNTech

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289