



00-717111

MODEL	VOLUME [®]			DOME VOLUME			WEIGHT	
	liters	U. S. gal	cubic FT	liters	U. S. gal	cubic FT	Kg	LBS
21x62	330	87.2	11.66	24.96	6.59	0.88	42.87	94.32

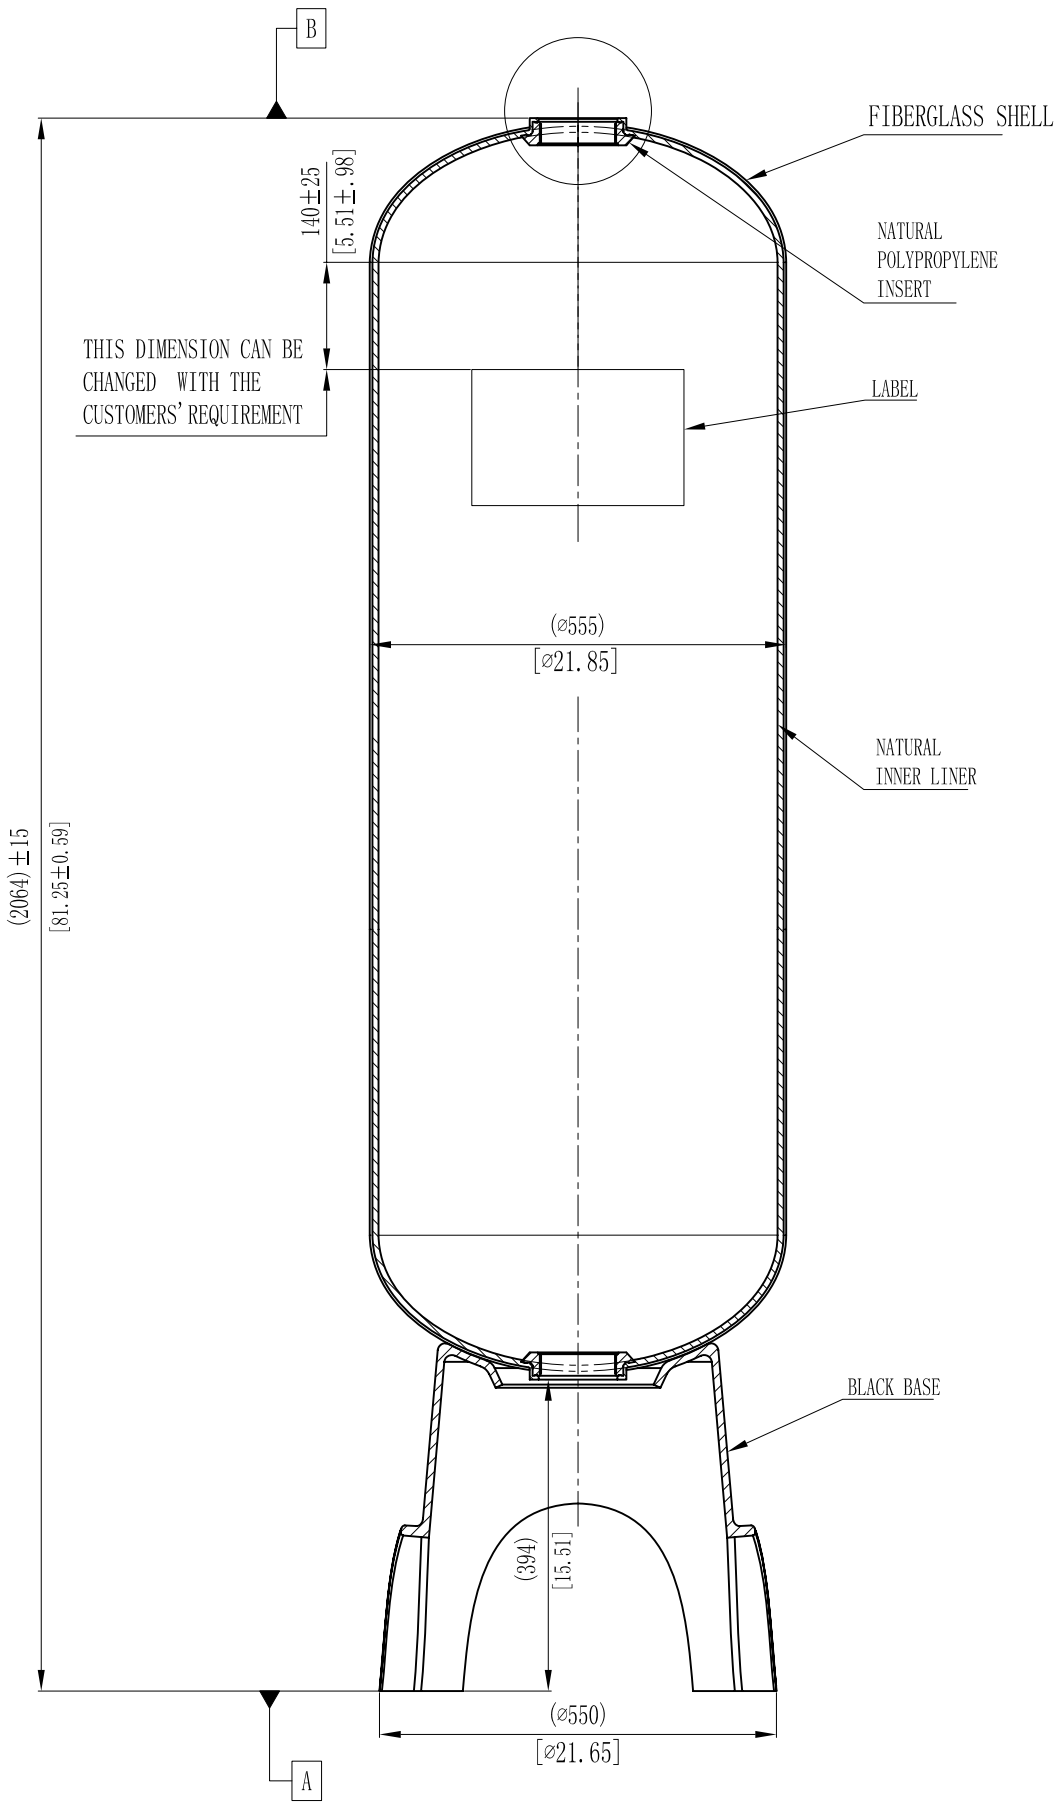



1:2

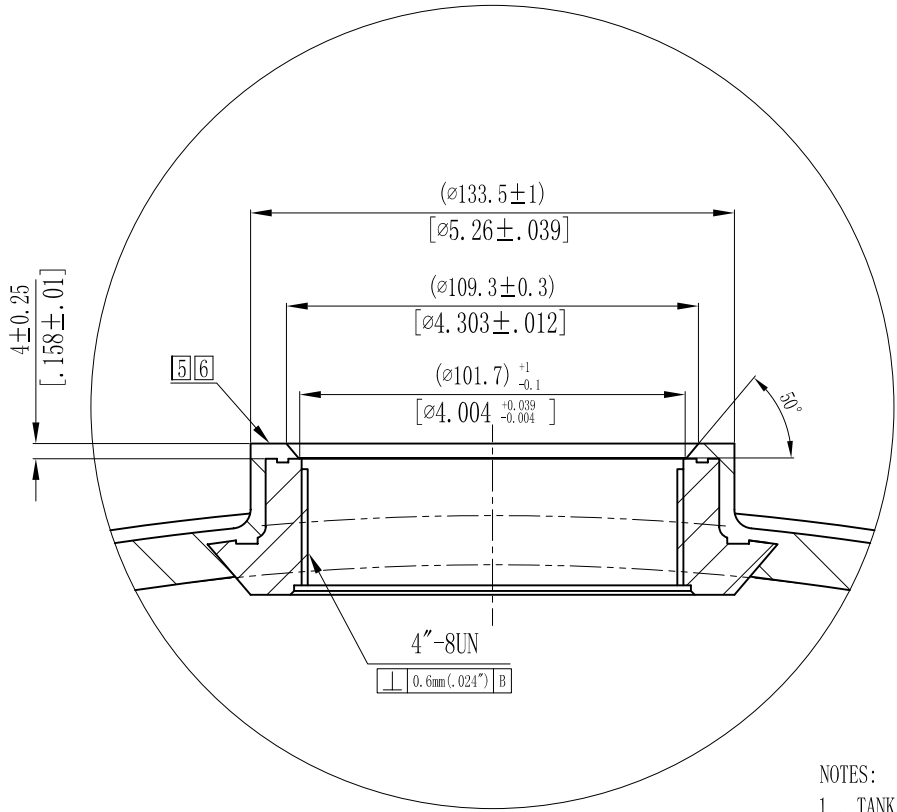

- NOTES:
- 1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
 - 2 . OPERATING SPECIFICATIONS:
 - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.3BAR)
 - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
 - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
 - 3 . VISUAL LINER INSPECTION
 - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
 - 4 . ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
 - 5 . SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
 - 6 . SURFACE FINISH.
 - 7 . DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
 - 8 . DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.
 - 9 . TANK TO BE BONDED TO BASE.
 10. USING A STANDARD LEVEL WITH TANK POSITIONED ON A LEVEL SURFACE, DATUM B TO BE PARALLEL WITH DATUM A. BUBBLE OF LEVEL MUST FALL COMPLETELY WITHIN LINES WHEN MEASURED AT 90° INTERVALS.



info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

4	THIS DRAWING IS UPDATED COMPLYING WITH THE CHINESE VERSION					2008/07/21	
VERSION NO.	DESCRIPTION OF CHANGES:					SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):			<div> WAVE CYBER (SHANGHAI) CO., LTD.</div>				
SIGNATURE							
	NAME	DATE	SCALE	MATERIAL	MODEL		
DESIGN			1 : 10		DESCRIPTION		
INSPECTION			QUANTITY	SMOOTHNESS	21" FRP PRESSURE VESSEL (DOUBLE OPENING)		
APPROVAL			PROJECTION	COMPUTER CODE	DRAWING NO.	VERSION NO.	
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.					111212-00	4	
			DO NOT MEASURE THE DIMENSTONS.		UNIT: MM		TOTAL PAGE: 1