


RA SX stainless steel filtering net - 70 micron washable cartridge

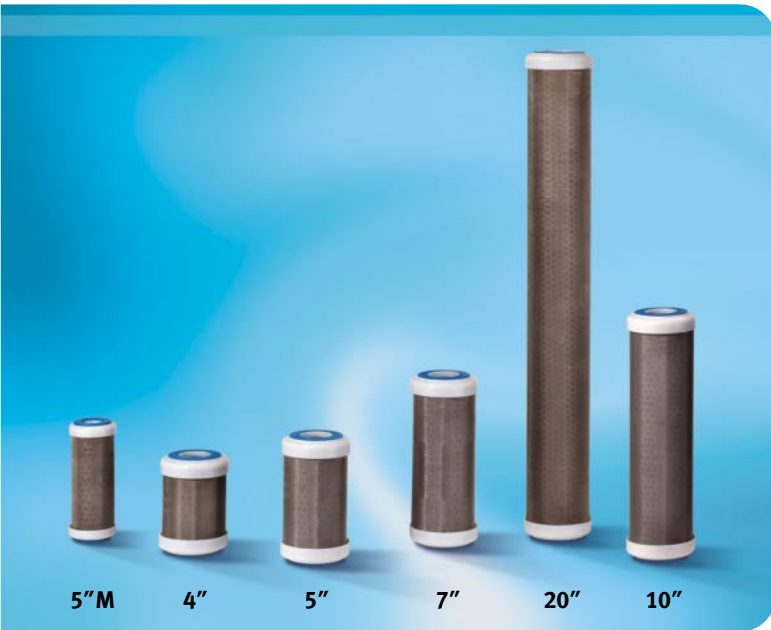

APPLICATIONS

Filtration of: sand, scales, rust.

Domestic use: filtration of drinking water, protection of taps, boilers, washing machines and other installations.

Technical use: pre-filtration for water-pumps, irrigation systems, protection of industrial installations; filtration of brackish water (only RA-A stainless steel AISI 316 type).

Average life-span RA-A: about 5 years.

Average life-span RA-C: about 3 years.

Maintenance: wash every 3 months.

WORKING CONDITIONS

Max working temperature _____ 45°C

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.

Filtrating medium: stainless steel net AISI 316 or AISI 304.

Inner armouring: stainless steel AISI 316 or AISI 304.

Inner core: polypropylene.

End caps: polypropylene.

Flat seals: PVC.

suitable housing	cartridge RA-A AISI 316	cartridge height	mm			recommended flow rate l/h
			A	B	C	
Mignon	RA Mignon-A SX 70 mcr	5''M	122	50	20	500
Cadet	RA 4-A SX 70 mcr	4''	92	70	30	650
Medium	RA 5-A SX 70 mcr	5''	125	70	30	800
Junior	RA 7-A SX 70 mcr	7''	173	70	30	1100
Senior	RA 10-A SX 70 mcr	10''	250	70	30	1600
Master	RA 20-A SX 70 mcr	20''	505	70	30	3000

suitable housing	cartridge RA-C AISI 304	cartridge height	mm			recommended flow rate l/h
			A	B	C	
Mignon	RA Mignon-C SX 70 mcr	5''M	122	50	20	500
Cadet	RA 4-C SX 70 mcr	4''	92	70	30	650
Medium	RA 5-C SX 70 mcr	5''	125	70	30	800
Junior	RA 7-C SX 70 mcr	7''	173	70	30	1100
Senior	RA 10-C SX 70 mcr	10''	250	70	30	1600
Master	RA 20-C SX 70 mcr	20''	505	70	30	3000



VARIANTS available on minimum quantity

Cartridges with different filtration rates.

Cartridges with stainless steel end caps, suitable for filtration of hot water.

