

GQG

LENNTECH

WATER TREATMENT SOLUTIONS

Submersible pumps with high power grinder



PATENTED

Construction

Submersible pumps with high power grinder, with horizontal flanged and threaded delivery port (DN 32 PN 6 - G 1 1/2). Double mechanical shaft seal with interposed oil chamber, to protect against dry-running.

Applications

Suitable for pumping waste water containing long filamentous, paper and textile materials and organics. They are particularly suitable for use in domestic, residential and industrial installations. Solid passage Ø 6 mm

Operating conditions

Liquid temperature up to 35° C.
Maximum immersion depth: 5 m.
Minimum immersion depth: 300 mm.
Continuous duty (with submerged motor).

Motor

2-pole induction motor, 50 Hz (n ≈ 2900 rpm).

GQG: three-phase 230 V ± 10%;
three-phase 400 V ± 10%;.

GQGM: single-phase 230 V ± 10%,
with float switch, thermal protection and control box with starting capacitors.

Cable: H07RN8-F, 4G1 mm² (4G1,5 mm² for GMGM 6-25), length 10 m.

Insulation class F.

Protection IP X8 (for continuous immersion)

Triple impregnation humidity-proof dry winding.

Constructed in accordance with: EN 60034-1;
EN 60335-1, EN 60335-2-41.


Materials

| Component | Material |
|---|---|
| Pump casing Impeller Casing cover | Cast iron GJL 200 EN 1561 |
| Rotating cutting blade Fixed cutting blade | Nickel-Molybdenum steel 1.4125 EN 10088 (AISI 440C) |
| Motor jacket Jacket cover | Chrome-nickel steel 1.4301 EN 10088 (AISI 304) |
| Handle | Polypropylene (with frame in AISI 304) |
| Shaft | Chrome-nickel steel 1.4305 EN 10088 (AISI 303) |
| Mechanical seal: upper lower | Ceramic alumina/Carbon/NBR |
| Seal lubrication oil | Oil for food/pharmaceutical machinery |

Other features on request

- Other voltages.
- Frequency 60 Hz.
- Other mechanical seal.
- Cable length 20 m.
- Vertical magnetic float switch.
- Three-phase pumps with incorporated float switch.

Characteristic curves n ≈ 2900 rpm

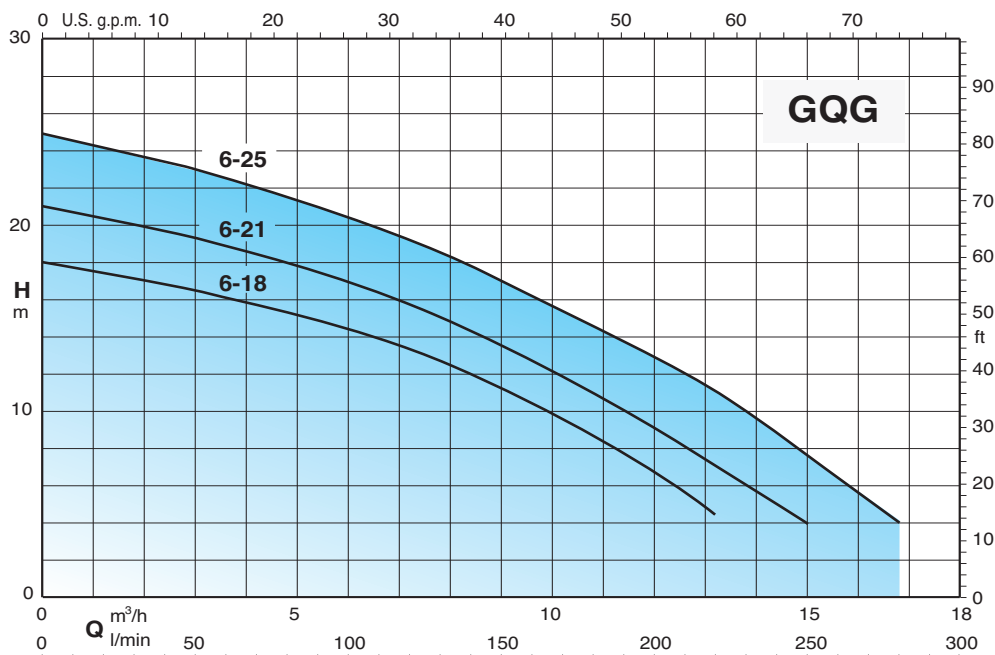

Performance $n \approx 2900$ rpm

| 3~ | 230V 400V | | 1~ | 230V Capacitor | | | P ₁ | P ₂ | | Q | H _m | | | | | | | | | | |
|-----------------|-----------|-----|------------------|----------------|-------|-----|----------------|----------------|-----|----------------|----------------|-------------------|-------|------|-----|-----|-----|----|------|----|------|
| | A | A | | A | μf | Vc | | kW | kW | | HP | m ³ /h | l/min | 0 | 3 | 6 | 9 | 12 | 13,2 | 15 | 16,8 |
| GQG 6-18 | 4 | 2,3 | GQGM 6-18 | 7 | 30+80 | 450 | 1,3 | 0,9 | 1,2 | H _m | 18 | 16,5 | 14,5 | 11,2 | 6,5 | 4,5 | | | | | |
| GQG 6-21 | 4,8 | 2,8 | GQGM 6-21 | 7,5 | 30+80 | 450 | 1,5 | 1,1 | 1,5 | | 21 | 19,2 | 17 | 13,5 | 9 | 7 | 4 | | | | |
| GQG 6-25 | 6,6 | 3,8 | GQGM 6-25 | 9,5 | 30+80 | 450 | 2 | 1,5 | 2 | | 25 | 23 | 20,5 | 17 | 13 | 11 | 7,8 | 4 | | | |


P1 Max. power input.

P2 Rated motor power output.

Density $\rho = 1000$ kg/m³.


Kinematic viscosity $\nu = \max 20$ mm²/sec.

Dimensions and weights


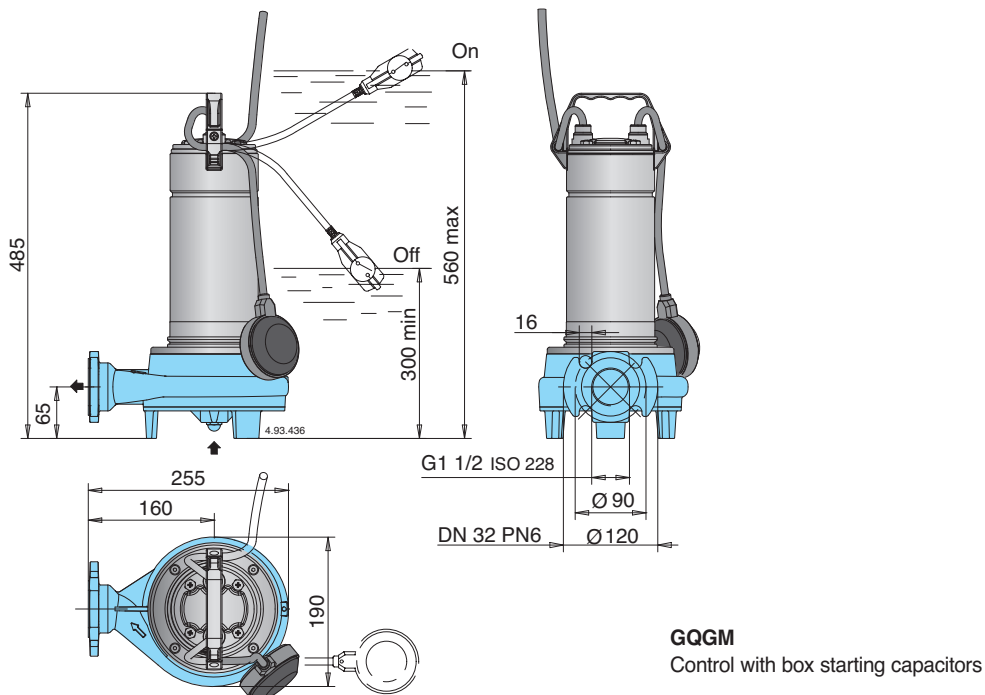


GQGM
Control with box starting capacitors


| TYPE | kg | |
|--------------------|------|------|
| | GQG | GQGM |
| GQG(M) 6-18 | 18,5 | 19,5 |
| GQG(M) 6-21 | 18,7 | 19,7 |
| GQG(M) 6-25 | 19 | 20 |



Installation example

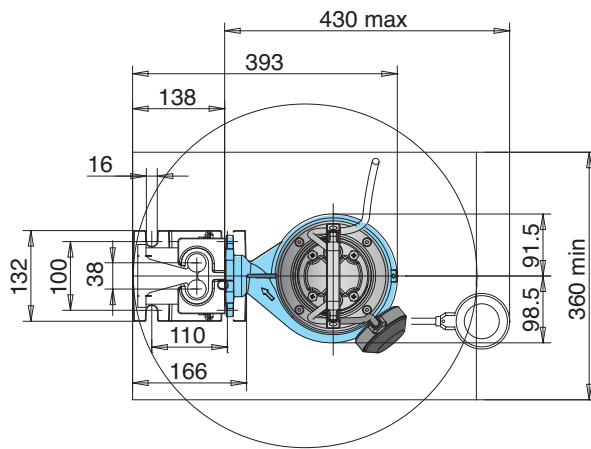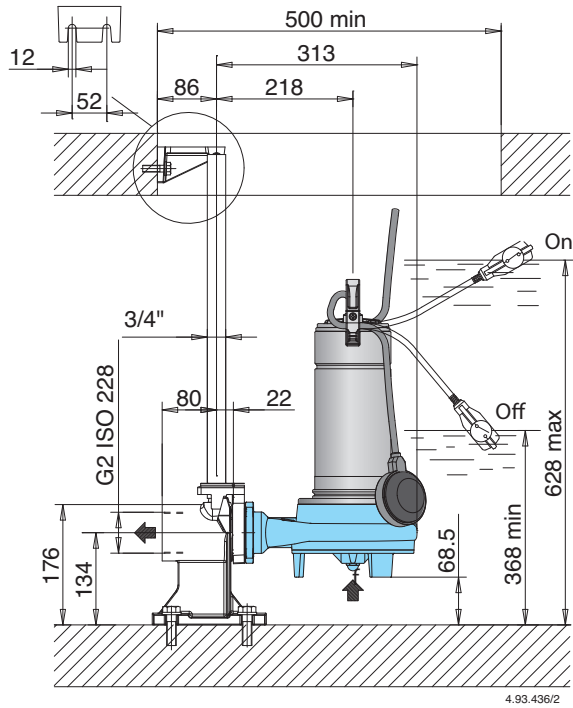

Features

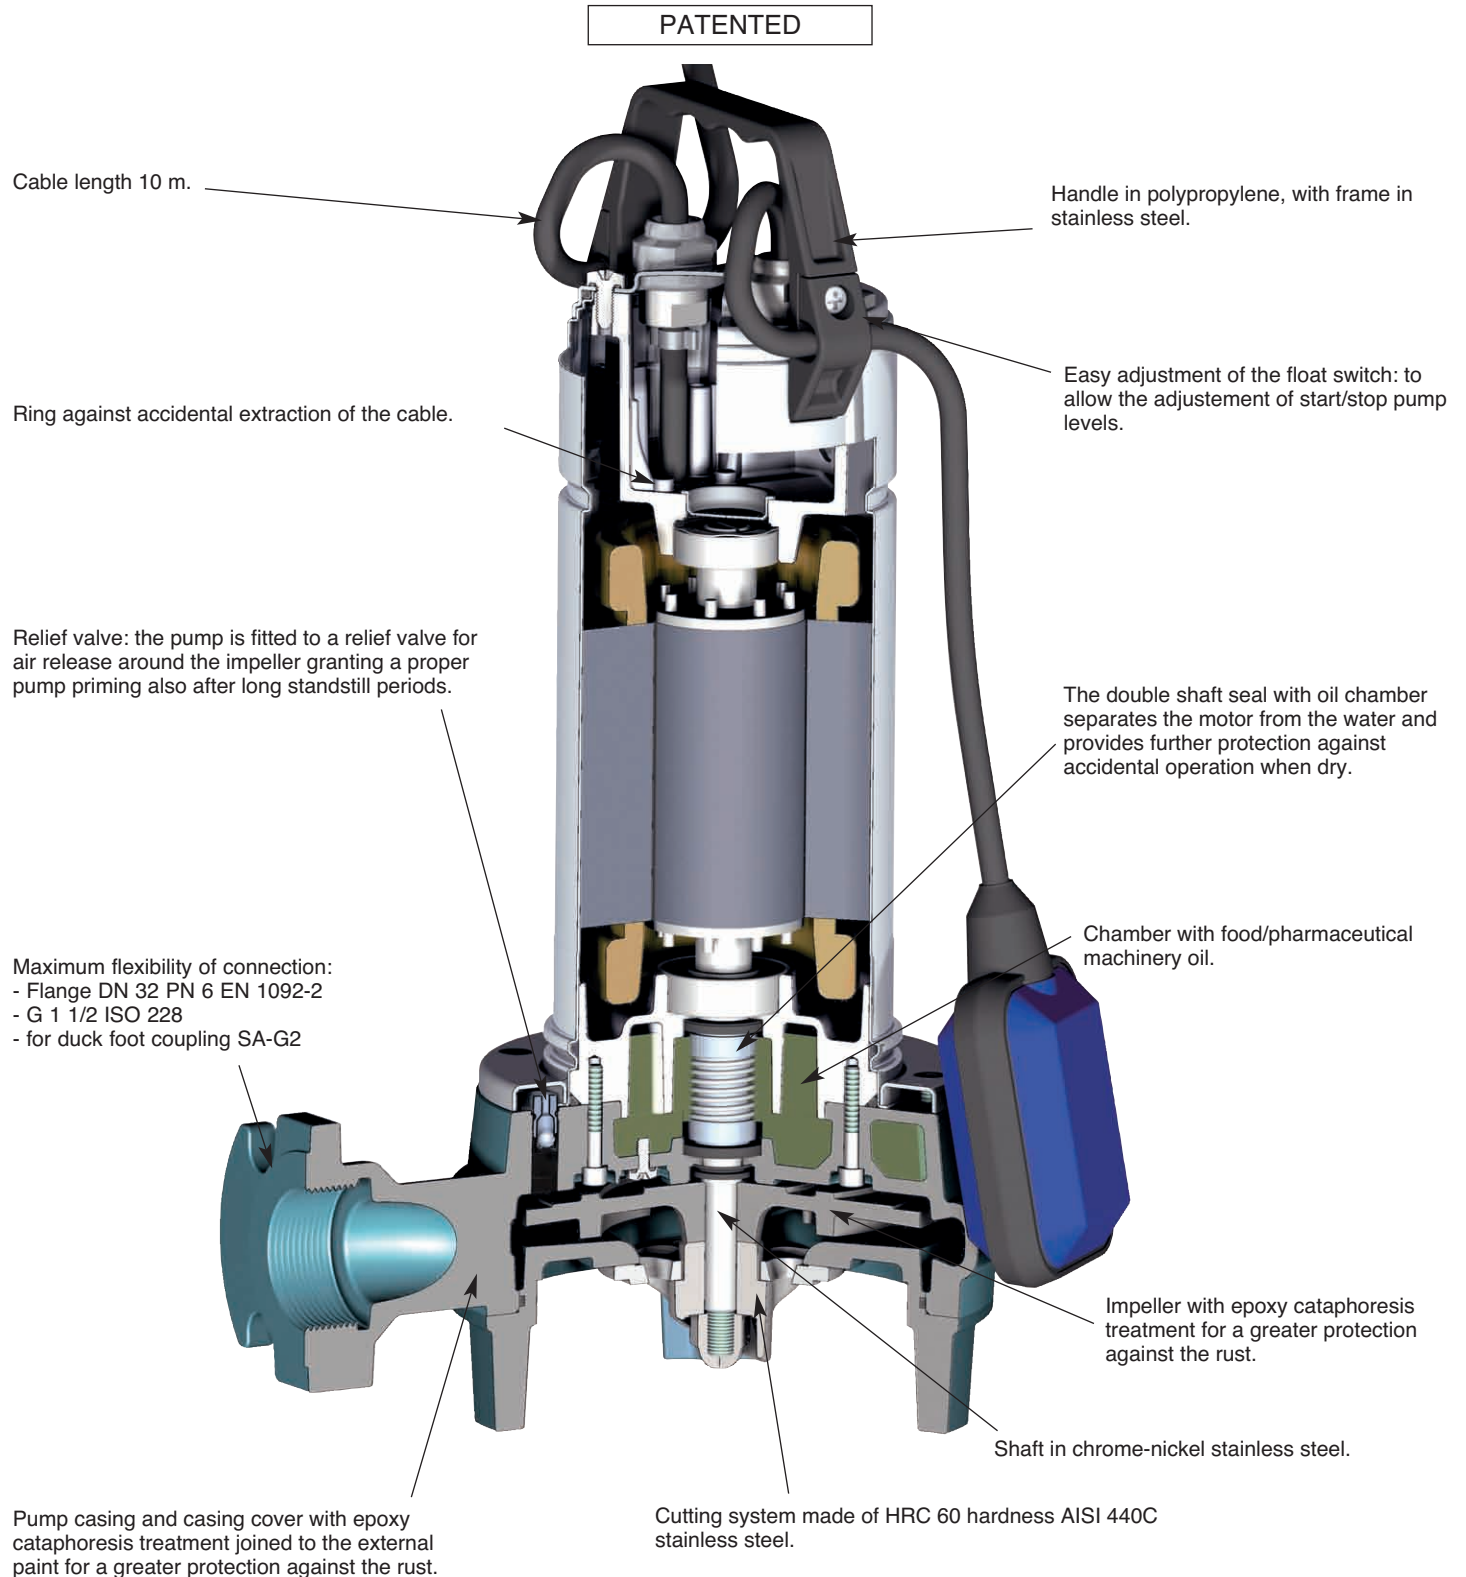

LENNTECH
 WATER TREATMENT SOLUTIONS

info@lennotech.com Tel. +31-152-610-900
 www.lennotech.com Fax. +31-152-616-289