

LOFWIND String Wound Filter Cartridges

LOFWIND filter cartridges are string-wound depth filter elements.

LOFWIND filter cartridges can be used in many different types of applications due to the many different combinations of filter materials and inner cores.

Applications:


Water treatment, sea water desalination, condensate preparation, process water, photo chemicals, film development, edible oils, solvents, galvanic baths, fats, acids, bases, chemical processes



Technical Data:

Filter Fineness (nominal):	0.5 - 1 - 3 - 5 - 10 - 25 - 50 - 75 100 - 150 μm
Length:	5" - 40"
Inside Diameter:	28 mm
Outside Diameter:	62 mm
Max. Working Temperature:	80°C (Polypropylene) 160°C (Cotton) 400°C (Glass fiber)
Max. Differential Pressure:	2.5 bar / 30°C

Max. Flow Rate
(Water flowing with $\Delta P = 0.15$ bar/cartridge length 9 3/4")

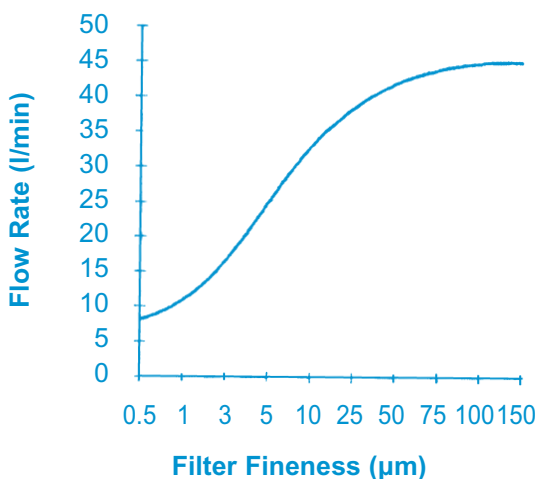

Product Code:

LOFWIND

Length

5 = 5"	(127 mm)
9 = 9 3/4"	(248 mm)
10 = 10"	(254 mm)
19 = 19 1/2"	(496 mm)
20 = 20"	(508 mm)
29 = 29 1/4"	(744 mm)
30 = 30"	(762 mm)
39 = 39"	(992 mm)
40 = 40"	(1016 mm)

Winding Material

B	= bleached cotton
H	= glass fiber, baked
P	= Polypropylene
W	= washed Polypropylene

Core

P	= Polypropylene
S	= stainless steel 316
T	= tinned steel

Filter Fineness (μm)

0.5 - 1 - 3 - 5 - 10 - 25 - 50 - 75 - 100 - 150

LW - 30 - B - S - 10

