

Flygt 2201.320

DEWATERING PUMP

60 Hz



Tough pumps for dewatering

The Flygt dewatering pumps from Xylem are designed for tough operating conditions. The pumps are ideal for applications in which the water or liquid contains high amounts of clay, stone chips, drilling fines etc, or to pump heavy sediment from tanks, sumps and containers.

This cast iron dewatering pump is designed for heavy-duty applications in which the liquids are corrosive, abrasive or contains salt water.

Our dewatering pumps are backed by an outstanding support and world-wide presence. operating in over 150 countries, we bring many years of experience to bear in order to keep your business moving.





LENNTECH

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289



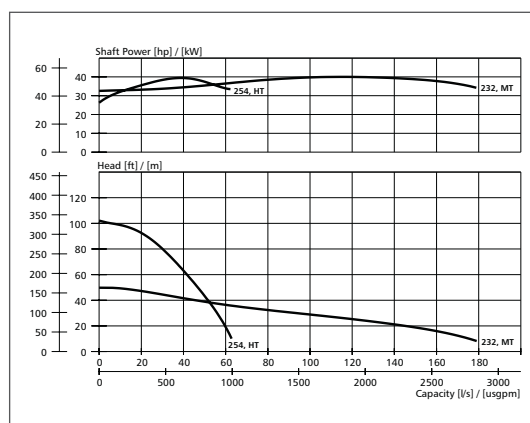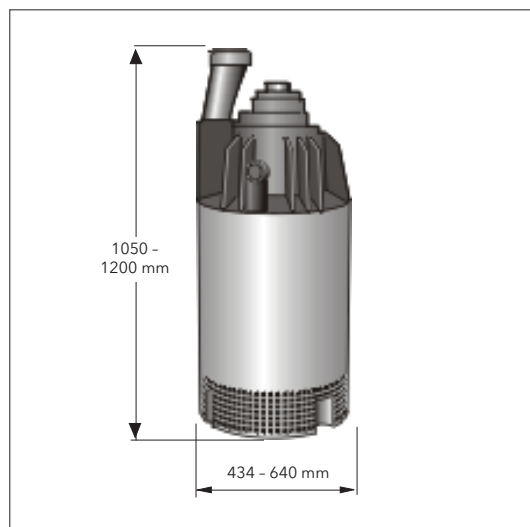

Voltage (V)	Rated current (A)	Starting current (A)
440	67	405
460	65	395
575	52	249

Flygt 2201.320

Submersible pump for dewatering construction sites, draining water in flooded areas, handling water in mines or on oil platforms and other similar applications. The pump can handle water containing relatively abrasive solids.

Denomination

Product code	2201.320
Installation	S
Impeller characteristics	MT, HT, ST
Discharge connection	4", 6", 8"

Process data

Liquid temperature	max +40° C
Depth of immersion	max 20 m
The pH of the pumped liquid	pH 6 -13
Liquid density	max 1100 kg/m ³
Strainer hole size	MT (15 mm x 45 mm)
	HT (10 mm x 10 mm)

Motor data

Squirrel cage 3-phase induction motor.	
Frequency	60 Hz
Insulation class	F (+155° C)
Voltage variation	
- continuously running	max ± 5%
- intermittent running	max ± 10%
Voltage imbalance between phases	max 2%
No. of starts/hour	max 15

Monitoring equipment

Thermal contacts.	
-------------------	--

Cable

Direct-on-line and Y/D start	SUBCAB®
------------------------------	---------

Materials

Outer casing	Cast iron
Impeller	MT Alloyed white iron
	HT Spring steel, Stainless steel
Wear parts	Nitrile rubber
Stator housing	Cast iron
Strainer	Galvanized steel
Shaft	Stainless steel
O-rings	Nitrile rubber

Mechanical face seals

Inner	Corrosion resistant cemented carbide
Outer	Corrosion resistant cemented carbide