

## GTCHB-Series Multi-Cartridge Band Clamp Liquid Filter Vessels


GTCHB-Series Multi-Cartridge Vessels are designed for industrial and commercial applications. Vessels are constructed of 304 or 316L stainless steel and accept DOE, 222/FLAT and 222/FIN end cartridges in 10, 20, 30 & 40 inch lengths.

### Features

- Easy access, self-centering heavy-duty band-clamp closure
- Heavy-duty welded mounting/support legs
- Single o-ring design (Buna standard)
- Universal seal cups and compression plates allow vessels to accept DOE, 222/FLAT or 222/FIN cartridges
- Poly-coat finish (exterior only)
- 316L stainless steel cap/spring assemblies and V-posts
- 150 PSI pressure rating

### Options

- Electropolished Finish
- Sanitary Porting
- Alternate Seal Materials
  - EPDM (required for NSF-61)
  - Teflon® Encapsulated Viton®\*
  - Viton®\*

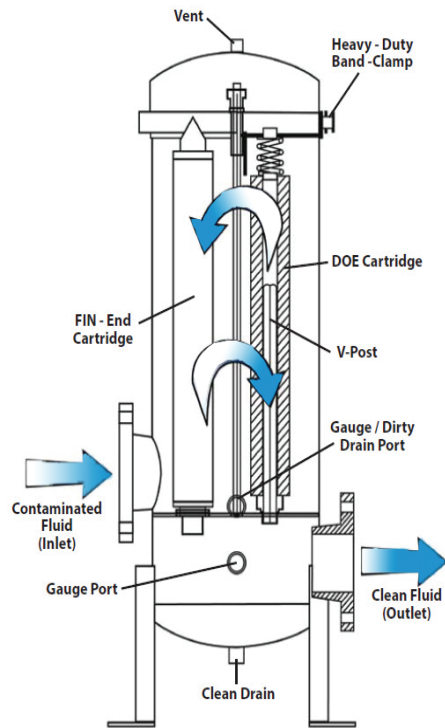

Certified to NSF/ANSI/CAN 61

NSF Certification applies for use only with drinking water. Only products bearing the NSF Mark on the product, product packaging, and/or documentation shipped with the product are Certified. Product options denoted with asterisk (\*) are not included in the Certification.

### Ordering Information

GTCHB	# of Cartridges	Length	Inlet/Outlet Size	Inlet/Outlet Style	Outlet	Material	Pressure Rating	Surface Finish	NSF
	4	1 = 10"	2 = 2", (50)	B = BSPT	2 = Opposite Outlet	4 = 304 SS	15 = 150 PSI @ 250°F	PC = Poly-coat	Blank = None
	5	2 = 20"	3 = 3", (80)	DN = DIN Flange		6 = 316L SS			MC = NSF-61
	7	3 = 30"	4 = 4", (100)	F = RF Flange					
	12	4 = 40"		M = MNPT					
	22								

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.

DS\_GTCHB\_190918