


## GWTB BB-Series Water Grade Meltblown Polypropylene

GWTB BB-Series Water Grade Meltblown Polypropylene Filter Cartridges:

- A gradient density structure provides for low pressure drop and high dirt holding capacity.
- All polypropylene construction presents excellent compatibility with a wide range of chemicals.
- Resists contaminant unloading, even at elevated differential pressures.
- Easy cartridge incineration and disposal.
- Free of additives, wetting agents, binders and silicone.



### Flow Rate vs Pressure Drop

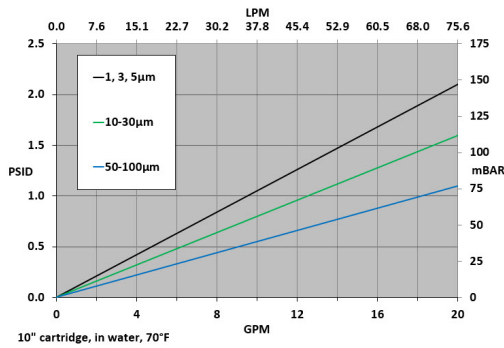

NSF Certification applies for use only with drinking water. Only products bearing the NSF Mark on the product, product packaging, and/or documentation shipped with the product are Certified. Product options denoted with asterisk (\*) are not included in the Certification.

Certified to NSF/ANSI CAN 61

### Construction Materials

Filtration Media..... Polypropylene

### Dimensions

Length..... 10 & 20 inches  
 Outside Diameter..... 4.5 inches  
 Inside Diameter..... 1.06 inches (2.69 cm)

### Cross - Reference

**Pentek®:**  
 DGD2501 = GWTB1  
 DGD5005 = GWTB5  
 DGD7525 = GWTB25

**Suez/GE®:**  
 LD01 = GWTB1  
 LD05 = GWTB5  
 LD10 = GWTB10  
 LD20 = GWTB20  
 LD30 = GWTB30  
 LD50 = GWTB50

### Performance Specifications

**Micron Ratings:**  
 1, 3, 5, 10, 20, 25, 30, 50, 75, 100

**Efficiencies:** 80%

### Operating Conditions

**Change Out ΔP (recommended)**.....35 PSID  
**Temperature (max)**.....140°F (60°C)  
**Differential Pressure (max)**.....50 PSID  
 (3.4 bar) at 68°F (20°C)

### Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 2002/72/EC, 1935/2004, and/or 10/2011.

### Ordering Information

GWTB	Rating (µ)	BB	Length
Water Grade	1	BB = 4.5" OD	10" (25.4 cm)
	3		20" (50.8 cm)
	5		
	10		
	20		
	25		
	30		
	50		
	75		
	100		

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required. For additional technical support, a product Performance Guide is available upon request.

DS\_GWTB BB\_190918