


Capillary Ultrafiltration Module

HYDRAcap® MAX 4040

Performance[†]	Filtrate Flow: Filtrate Turbidity: Bacteria removal:	1.4 – 4.4 gpm (0.3 – 1.0 m ³ /h) ≤ 0.10 NTU ≥ 4 log
Type	Configuration: Membrane Polymer: Nominal Membrane Area: Fiber Dimensions: Pore size:	Capillary Ultrafiltration Module PVDF 97 ft ² (9 m ²) ID 0.024" (0.6 mm), OD 0.047" (1.2 mm) 0.08 micron
Application Data[‡]	Typical Filtrate Flux Range: Maximum Applied Feed Pressure: Maximum Transmembrane Pressure: Instantaneous Chlorine Tolerance: Maximum Chlorine Exposure: Maximum Feed Turbidity: Maximum Operating Temperature: pH Operating Range: Cleaning pH Range: Operating Mode:	20 – 65 gfd (34 – 110 l/m ² /h) 73 psig (5.0 bar) 30 psig (2.0 bar) 5000 ppm 750,000 ppm-hrs 300 NTU 104 °F (40 °C) 4.0 – 10.0 1.0 – 13.0 Outside to Inside Filtration Dead End or Cross flow mode

Typical Process Conditions

Air Scour Rate:	1.3 – 1.6 acfm (2.2 – 2.7 m ³ /h)
Air Scour Duration:	120 – 240 seconds
Air Scour Frequency:	Once every 20 – 60 minutes
Maintenance Clean Frequency:	1 – 3 times per day
Maintenance Clean Duration:	20 – 30 minutes
Disinfection Chemicals:	NaOCl, ClO ₂ or NH ₂ Cl
Cleaning Chemicals:	NaOH, HCl, H ₂ SO ₄ or Citric Acid

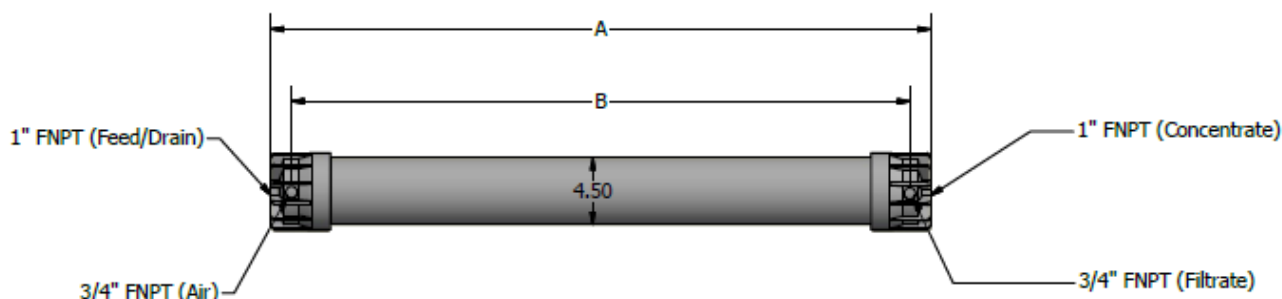

A, inches (mm)	B, inches (mm)	Feed Pipe Connection	Filtrate Pipe Connections	Dry Weight	Wet Weight
44.88 (1140)	41.42 (1052)	1" FNPT	3/4" FNPT	25 lbs (11.3 kg)	51 lbs (23.1 kg)

* At 68°F (20°C).

** For 60 minutes or less.

*** Higher values can be treated. Consult with Hydranautics' technical staff.

† Typical module performance for most feedwaters.

‡ The limitations shown here are for general use. The values may be more conservative for specific projects to ensure the best performance and longest life of the membrane.

Notice:

Hydranautics believes the information and data contained herein to be accurate and useful. The information and data are offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses.

7/20/15

LENNTECH

info@lennotech-data Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289