

Product Description

Membrane material	Composite polyamide
Membrane type	ORM45K
Design	Spiral wound

Specification

Model	Flow*		Rejection	Area		Spacer	
	l/hr	GPD		m2	ft2	mm	mil
KM 2540-C	120	750	99,75/99,4	2,6	28	0,71	28

*
test solution of NaCl
32 g/l, P=5,5 MPa,
T=25 °C, pH=7,5.
Recovery - 8%

*
Flow of each single
element in a batch may
vary for +/-20%

**
Nominal rejection is
reached after 100
hours of continuous
operation on test
solution.


Minimal rejection
of a new element after
20 minutes' test on
test solution.

Operating conditions

Recommended operation pressure, MPa	4,5-6,5
Maximum operation pressure, MPa	7
Maximum pressure drop, MPa	0,1
Operation temperature, °C ¹⁾	4-45
pH range at operation ¹⁾	2-11
CIP pH (short time operation)	1-12
Free chlorine content, mg/l max	0,1
Maximum feed flow, m3/hr	1,4
Concentrate/permeate ratio on each element, min	5:1
SDI (15 minutes test), max	5
Turbidity, NTU max	1

1)

During continuous
work with pH over 10
the temperature must
not exceed 35°C

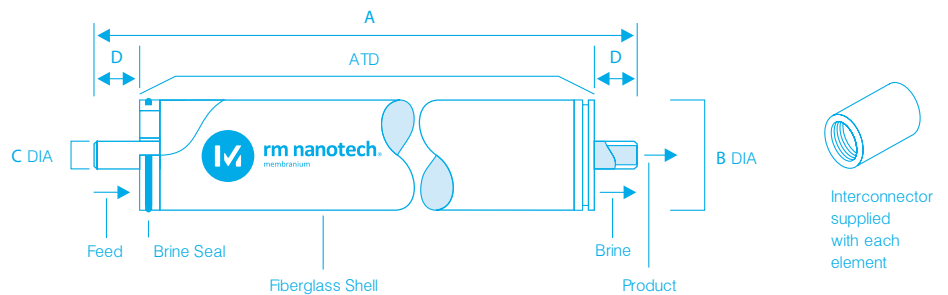

Model	A mm	B mm	B' (ATD) mm	C mm	D mm	Weight kg
KM 2540-C	1016	63,5	61	19,1	30,5	2,2

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289