

DIAION™ UBK04H

DIAION™ UBK04H is a cation exchange resin with a uniform particle size. It has 4% cross-linkages and excellent properties. A wide range of applications, especially in a field of catalysts, is recommended.

Product

Grade Name	DIAION™ UBK04H
Type	Strong Acid Cation
Matrix	Styrene-DVB, Gel
Functional Group	Sulfonic acid
Ionic Form	H ⁺

Specification

Whole Bead Count	-	95 min.
Salt Splitting Capacity	meq/mL	1.2 min.
Water Content	%	65 - 70
Average Diameter	μm	500 ± 50
Uniformity Coefficient	-	1.2 max.
Ionic Conversion (H ⁺)	%	95 min.

Typical Properties

Shipping Density	g/mL	840
Particle Density	g/mL	1.13
Total Swelling (Na ⁺ to H ⁺)	%	9

Recommended Operating Conditions

Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 40
Regenerant		HCl H ₂ SO ₄
Regenerant Concentration	%	HCl 4 - 10 H ₂ SO ₄ 1 - 4
Regenerant Level	g/L	30 - 150
Regenerant Flow Rate	m/h	2 - 10
Total Rinse Requirement	BV	2 - 10



Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAION™ UBK04H resin in normal down flow operation is shown in the graphs below.

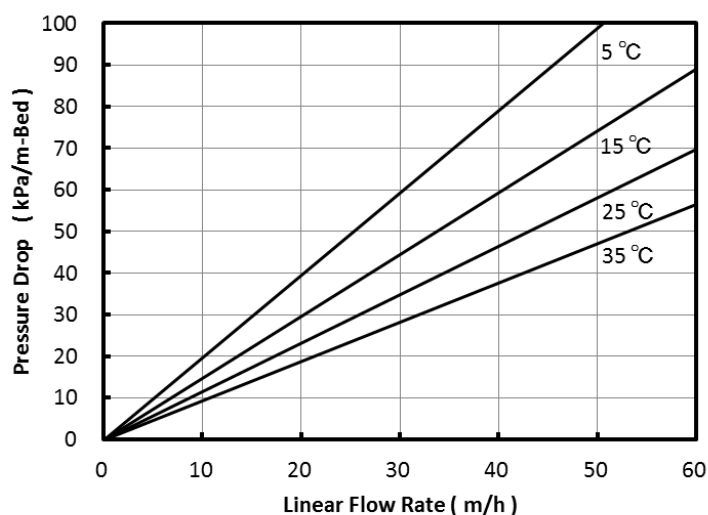


Fig. 1 Pressure Drop of UBK04H

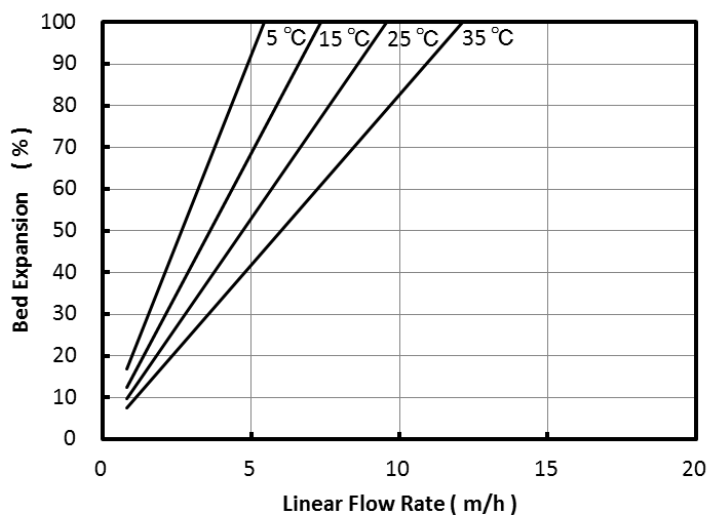


Fig. 2 Bed Expansion of UBK04H

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.

No.01-02-A-0101

