

XPleat* GF filters

glass microfiber nominal and absolute



figure 1: XPleat GF filters

typical applications

- For general water services
- For fine process fluid filtration
- For processes that require excellent flow rates

general properties

XPleat GF filters are available in nominal and absolute micron ratings (Figure 1). The nominal micron ratings are: 0.2, 0.45, 1.0, 3.0 and 10.0 μm . The absolute micron ratings are 1.0, 2.0, 4.0, 8.0 and 15.0 μm . Tables 1, 2, 3 and 4 show further details on materials of construction, dimensions, operational limits and flow performance.

table 1: materials of construction

Filter Media	Glass Microfiber
Media Support	Polyester
Components	Polypropylene
Sealing	Thermal Bonding
O-Rings/Gaskets	Silicone, Buna, Viton, EPDM

Water Technologies & Solutions fact sheet


table 2: dimensions (nominal)

Outside Diameter	2.75" (70mm)
Inside Diameter	1.25" (31 mm)
Effective Filtration Area	3.4 ft ² (0.32 m ²)
Lengths	10, 20, 30, 40 inches (25.4, 50.8, 76.2, 101 cm)

table 3: operational limits

Maximum Forward Differential Pressure	60 psid (4.14 bar)
Maximum Reverse Differential Pressure	30 psid (2.07 bar)
Maximum Operating Temperature	180°F (82°C) at 10 psi (0.69 bar) in water

table 4: flow performance in clean water¹

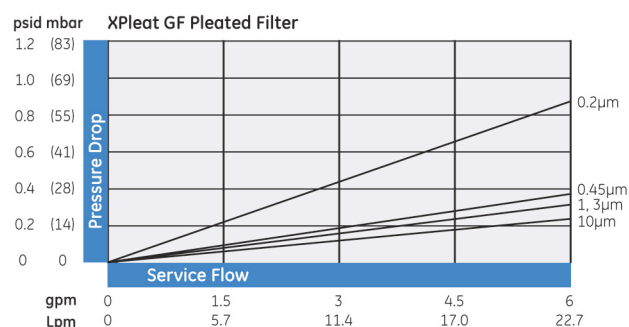

¹data based on 10" length filter

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

additional information

- SUEZ Water Technologies & Solutions filter cartridges are designed and manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users should carefully verify chemical compatibility. Please contact your SUEZ distributor for more information.
- Table 5 provides ordering information on the XPLEat GF filters.

table 5: ordering information

Product Name	Membrane/Media	Nominal (Absolute) Micron Rating	Length Inches (cm)	End #1 Adapter	End #2 Adapter	Elastomer Material
XPLT	GF	0.2 µm (1.0) 0.45 µm (2.0) 1.0 µm (4.0) 3.0 µm (8.0) 10.0 µm (15.0)	10 (25.4) 20 (50.8) 30 (76.2) 40 (101.6)	OEG ³ 213 ⁴ 222 226	OEG 213 FIN FLT	B = Buna-N E = EPDM S = Silicone V = Viton
Example: XPLT-GF-0.2-10-222-FIN-E						

² Viton is a registered trademark of DuPont.

³ OEG-Open End Gasket

⁴ 213-FLT for use with 10" Ametek Housings

XPLEat is available in case quantities only.
XPLEat part numbers reflect case quantities of six (6).
Viton Gaskets available for additional charge



LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289