


# Testomat 2000® CN

**LENNTECH**

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289

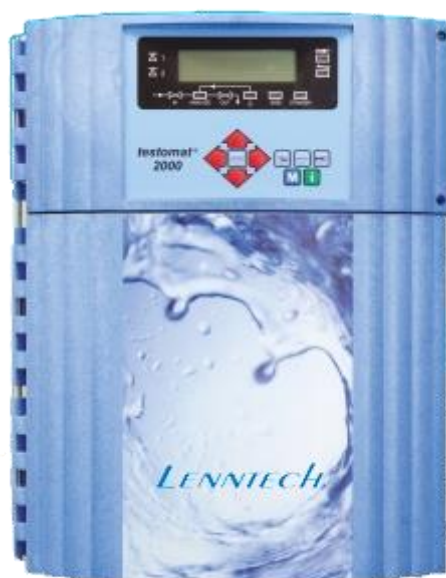

The **Testomat 2000® CN** is an online analysis instrument for water hardness for the Chinese market with a Chinese menu. It is identical with our **Testomat 2000®**.

## Application

- water treatment plants
- water blending plants
- drinking water plants
- water softening plants
- decarbonization plants
- desalination plants
- boiler houses
- cooling towers

## Measuring range

0.05-25 °dH Water hardness

0.5-20 °dH Carbonate hardness

1-15 mmol/l p-value

0.05-0.5 mmol/l minus m-value

(depending on the choice of the indicator)

## Technical Data

**Power supply:** 230–240 VAC, 115 VAC, 24 VAC all 50–60Hz

**Power consumption:** max. 30 VA

**Protection class:** I

**Degree of protection:** IP 65

**Ambient temperature:** 10–45 °C, 50 - 104°F

**Option:** booster pump see accessories

**Dimensions (B x H x T):** 380 x 480 x 280 mm

**Weight:** approx. 9.5 kg

**Menu languages:** Mandarin, English

## **Mains water supply**

**Operating pressure:**

1 to 8 bar (15 to 116 psi) or

0,3 to 1 bar (5 to 15 psi), after removing of the valve body out of the regulator/filter housing

**Water inlet:** Opaque hose with 6 mm external diameter/4 mm internal diameter

**Water outlet:** Hose with 6 mm external diameter/4 mm internal diameter

**Water temperature:** 10 to 40 °C; 50 to 104°F