


"MEMBRAY" Specifications

Module Type			TMR140-050S	TMR140-100S	TMR140-200W	TMR140-200D	TMR140-400DW
Flow Capacity		m ³ /day*	8 – 53	15 – 105	30 – 210	30 – 210	60 – 420
		gal/day*	2,100 – 14,000	4,000 – 27,700	7,900 – 55,500	7,900 – 55,500	15,900 – 111,000
Number of Membrane Elements			50	100	200	200	400
Total Membrane Area		m ²	70	140	280	280	560
		sq.ft.	750	1,510	3,010	3,010	6,030
Dimensions	Width	mm	810	810	840	810	840
		inch	31.9	31.9	33.1	31.9	33.1
	Length	mm	950	1,620	3,260	1,620	3,260
		inch	37.4	63.8	128.3	63.8	128.3
	Height	mm	2,100	2,100	2,100	4,160	4,160
		inch	82.7	82.7	82.7	163.8	163.8
Weight (dry)	Module	kg	400	695	1,430	1,365	2,690
		lb.	882	1,532	3,153	3,009	5,930
Materials	Diffuser, Frame, Permeated Water Manifold		304 stainless steel (316 stainless steel is available as option)				

*These are reference values with typical municipal wastewater, not guaranteed values.
 *Specifications subject to change without notice due to technical modifications or production changes.

TORAY satisfies global water treatment needs.

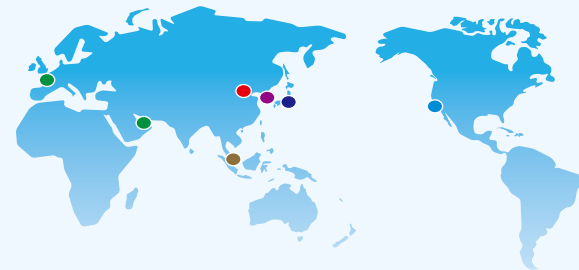

LENNTECH

info@lennotech.com Tel. +31-152-610-900
 www.lennotech.com Fax. +31-152-616-289



About Toray

Established in 1926, Toray is a worldwide leader in chemical manufacturing and related products. Leveraging decades of experience in synthetic fibers and textiles, Toray has expanded into many other fields such as carbon fiber and its composites, plastics, fine chemicals and innovative water treatment technologies.

Toray is committed to achieving sustainable growth and environmental preservation, while meeting the diverse needs of its customers worldwide. Toray constantly strives to contribute to the countries and communities in which it operates, not only through superior products and services, but by acting as a concerned corporate citizen. In this way, Toray seeks to play its part in building a better society for all the people of the world.



MEMBRAY is a trademark of Toray Industries, Inc.

TORAY
 Innovation by Chemistry

MEMBRAY™ TMR0140 Series
 Submerged Flat Sheet Membrane Module for MBR



MEMBRAY™ improves MBR system performance.


Toray Industries, Inc.

Toray's advanced membrane separation technology and nanotechnology create better MBR modules.



The "MEMBRAY" submerged flat sheet membrane module, when used as a component of a membrane bioreactor (MBR) system, effectively removes suspended solids. This innovative microfiltration module in a plate-and-frame configuration with flat sheet membranes was developed thanks to over 25 years of experience in high-quality membrane products and our non-compromise R&D, manufacturing and application expertise.

The "MEMBRAY" module configuration comprises an element block and an aeration block. The element block contains a number of membrane elements stacked at equal intervals, each of which has flat sheet membranes attached on both sides of a supporting panel. Each element is connected via a tube to a permeated water manifold. The aeration block consists of air diffusers used to supply air.

Conventional wastewater treatment system

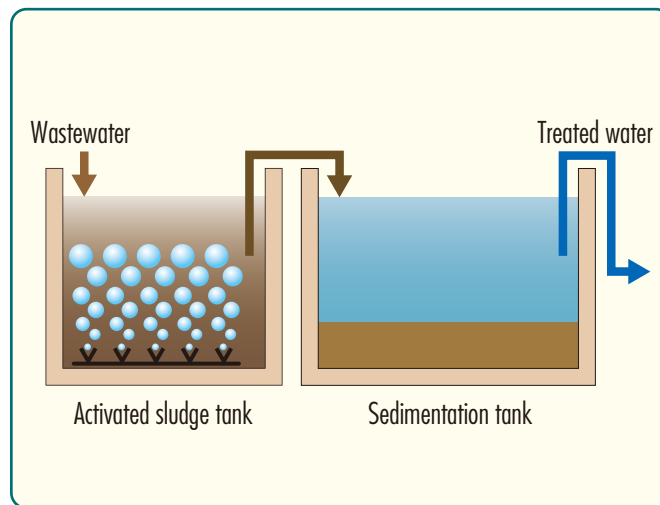

MBR system using "MEMBRAY"

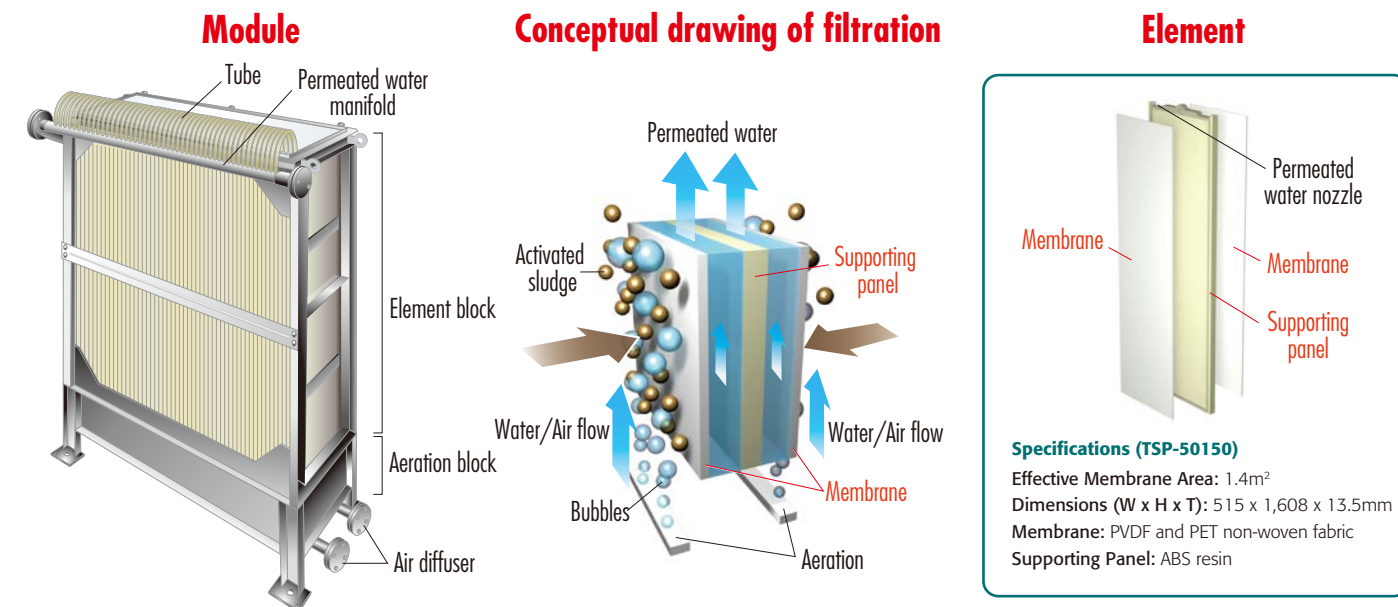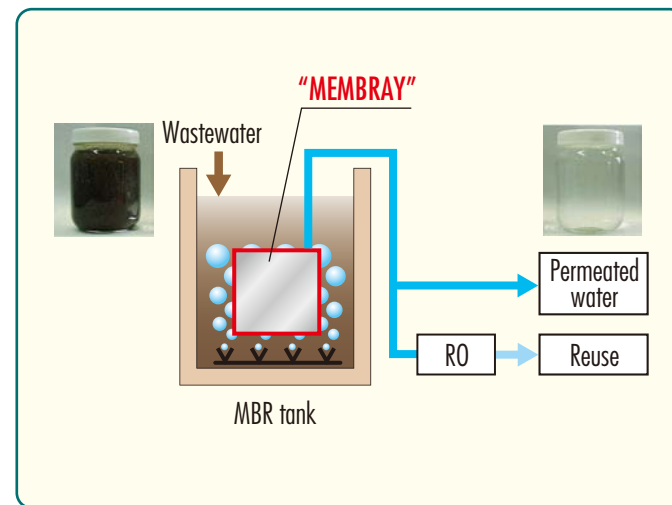


MBR with "MEMBRAY" Submerged Flat Sheet Membrane Module

MBR technology enhances wastewater treatment efficiency

- Using membranes to separate sludge ensures much higher quality for treated water free from suspended solids. Combination with RO membranes allows producing water quality as good as potable water.
- Membranes can retain activated sludge at high concentrations, allowing BOD as well as nitrogen to be removed more efficiently.
- Unique membrane configuration having an immense number of minuscule pores delivers stable high water permeability with minimal clogging and higher permeated water quality.

Smaller footprint

- The module can be submerged directly in an activated sludge tank for combining biological treatment and membrane separation. It eliminates the sedimentation or sludge concentration process.
- More effective biological treatment allows activated sludge tank size to be reduced.

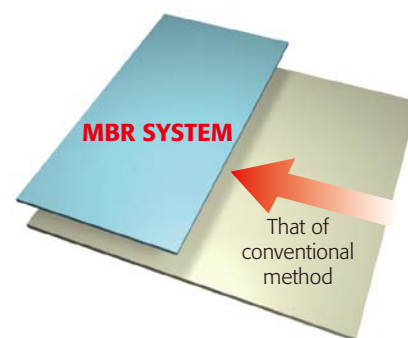

Fewer chemical cleaning requirements and coarse screen pretreatment

- The plate-and-frame configuration that employs flat sheet membranes is inherently stronger against fouling than the hollow fiber membrane configuration. Therefore, it results in fewer chemical cleaning requirements.
- Reduced module fouling from human hair and other obstructive substances allows coarse screening as a pretreatment process.


Energy efficient

- "MEMBRAY" consumes less energy compared to hollow fiber membrane due to more effective scouring aeration and lower trans-membrane pressure.

Why "MEMBRAY" performance ranks with the best.


Guaranteed high water permeability and high effluent quality

- Many 0.08 micron pores on the membrane surface effectively eliminate 0.1 micron+ particles to improve effluent quality.
- Uniform pore size results in consistently high permeability with minimal pore clogging.

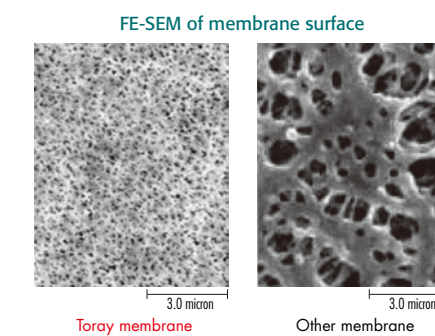

Unique membrane structure

Numerous small-diameter pores are distributed evenly throughout the membrane surface with a narrow diameter distribution. This structure ensures higher treated water quality and minimizes membrane fouling and pore clogging for consistently high water permeability.

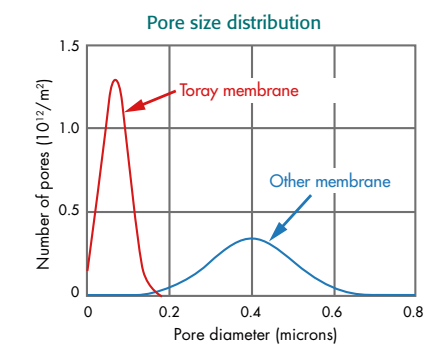

Better membrane materials

Using PVDF (polyvinylidene fluoride) for the functional layer of the membrane and PET (polyester) non-woven fabric as the base layer allows the membrane to exhibit superior physical strength and chemical stability.

Flat sheet type membrane with modified surface nature

The membrane has a simple flat sheet configuration. This configuration and the modified membrane surface nature allow very effective cleaning by a stream of water generated upward as scouring air is diffused below it. This mechanism provides extremely stable filtration as the membrane does not allow sludge to adhere to its surface.

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289