

## 4" Spiral Wound Elements for Sea Water


**Description:** High Rejection, High Productivity:  
High pressure application for sea water treatment

### Specifications:

Model	Permeate Flow GPD(m <sup>3</sup> /day)	Active Membrane Area ft <sup>2</sup> (m <sup>2</sup> )	Stabilized Salt Rejection	Feed spacer mil(mm)	Test Conditions
SW- 4040	1900 (7.2)	90(8.4)	99.7%	28(0.7)	800psi/32800ppm NaCl

1. All performance data are collected at 25°C (77°F), pH7.5 and 8% recovery rate.
2. Permeate flows for single element may vary ±15%.

### Element Dimension:

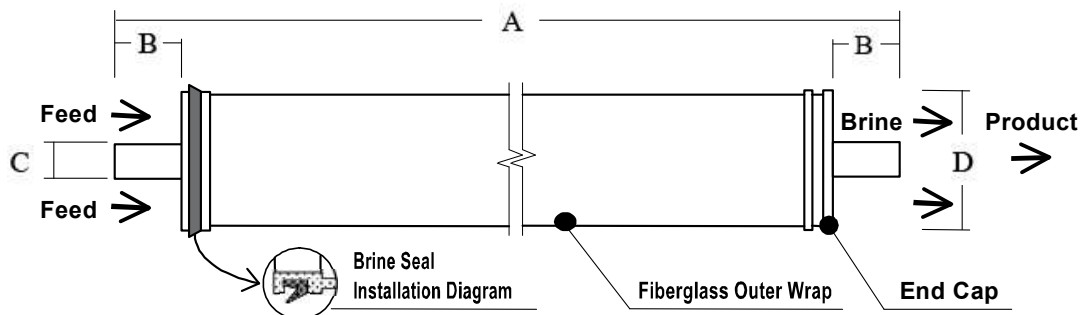

Product	Dimensions – Inches (mm)			
	A	B	C	D
SW- 4040	40.0 (1016)	1.05 (26.7)	0.75 (19)	3.9 (99)

\* 1 inch= 25.4 mm

**Operating Limits  
for Design:**

Maximum Operating Temperature.....	45°C(113°F)
Maximum Operating Pressure.....	1000psi(69bar)
Maximum Pressure Drop (single element).....	15psi(1.0bar)
pH Range for Continuous Operation.....	3-11
pH Range for Cleaning.....	1.5-12
Chlorine tolerance.....	<0.1ppm
Maximum Feed SDI.....	5



**LENNTECH**

info@lennotech.com Tel. +31-152-610-900  
www.lennotech.com Fax. +31-152-616-289