

Polypropylene pleated graded-density filter cartridges featuring APT Construction for Extended Filter Lifetime

3M Purification's Betafine PEG Series filter cartridge, formerly known as PolyPro XL, represents a major advance in pleated polypropylene filter design and performance. Advanced Pleat Technology (APT) construction combines:

- up to 50% more filter media (surface area) than competitive filters,
- graded-density media for optimum contaminant holding,
- new cartridge design for increased flow and reduced pressure drop.

The result is a filter cartridge that lasts longer, performs better and saves money.

The APT Advantage

Surface area dictates just how long a filter will last and how it will perform. However, increasing surface area without considering the flow path between the media's pleats could result in flow restrictions and early media blinding. To achieve the optimum between surface area and performance, 3M Purification has designed Betafine PEG Series so that the pleating process and media support materials work together to provide enhanced flow characteristics and longer service life.

Features and Benefits

Advanced Pleat Technology construction for extremely high surface area

- Higher product throughputs for extraordinarily long service life
- Lower total filtration operating costs
- Lower pressure drops for higher flow rates

Absolute-rated filter performance

- Consistent and reproducible contaminant removal
- Higher product quality and yields

Graded-density multi-layer filter media

- Selective entrapment of contaminant throughout the filter media to maximise filter life
- Higher contaminant holding capacity

Polypropylene cartridge components free of adhesives and surfactants

- Very low extractable levels for optimum filtrate purity
- Broad chemical compatibility for most aggressive process applications

100% integrity tested versions available


- Pre-qualification and assurance in critical applications
- Suitable for final filtration in many applications

Robust polypropylene cartridge construction

- Extends service life and compatible with a wide range of solvents and cleaning solutions



Figure 1: Surface Area Comparison

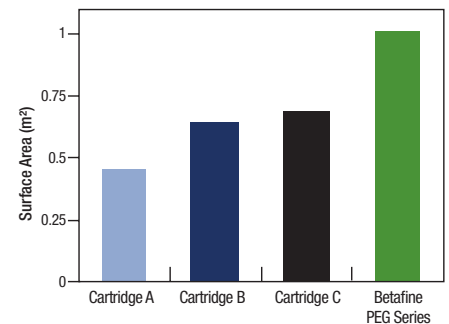



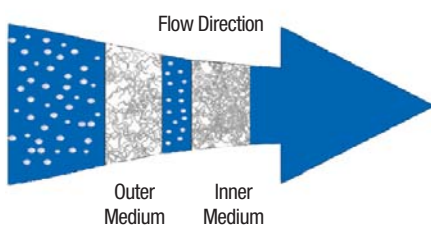


Figure 2: Flow vs. Differential Pressure
Clean Water Flow per 10 Inch Cartridge at Ambient Temperature (20 °C)

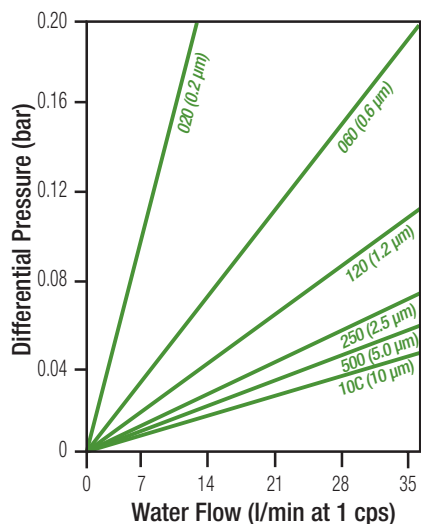

Standard Cartridge

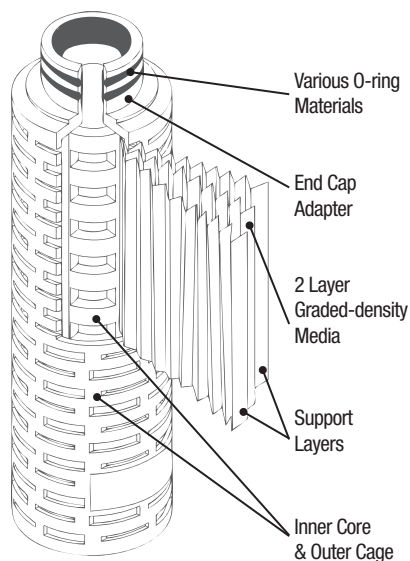

Graded-Density - the key to longer life

The Betafine PEG Series filter’s graded-density media structure removes particles sequentially by size - the larger particles by the more open, outer medium and the smaller particles by the tighter, inner medium. The outer medium acts as a prefilter, while the inner provides the absolute removal specified by the cartridge rating. This construction effectively spreads the contaminant through the depth of the filter media resulting in extremely high contaminant capacity with lower pressure drop for longer service life.

Chemical Compatibility

Polypropylene construction provides chemical compatibility in many demanding process fluid applications. Compatibility is influenced by process operating conditions. In critical applications, cartridges should be tested under actual conditions to ensure correct selection.

Flow Characteristics and Sizing Options

Reduced cartridge change-out frequency

For a given process flow rate, the graded-density structure and maximum filter area decrease filter cartridge change-out frequency by 30 to 50 percent or more depending on the application.

Reduced filter housing costs

For new applications, the low pressure drops of the Betafine PEG Series filter allow smaller or fewer housings to be specified. Fewer filter cartridges and smaller housings provide lower capital and consumables costs, year after year.

Ideally, filter systems should be sized at an initial differential pressure of 0.04 to 0.07 bar. Low flow rates further extend the life of the filter system. In most applications, doubling the filter area (reducing the flow rate per unit area by one-half) results in two and one-half times the throughput.

| Betafine PEG Series Cartridge Specifications | |
|--|--|
| Materials | |
| Media | Graded-Density Pleated Polypropylene |
| Supports | Polypropylene |
| Core, Cage, End Caps | Polypropylene |
| Gasket and O-ring Options | Silicone, Fluorocarbon, Ethylene Propylene, Nitrile |
| Operating Conditions | |
| Maximum Operating Temperature | 60 °C continuous 80 °C short term |
| Maximum Forward Pressure Differential | 4 bar at 25 °C |
| Maximum Reverse Pressure Differential | 4 bar at 25 °C |
| Cartridge Dimensions | |
| Media area versions PEG | 1 m ² 10 micron cartridge has media area of 0.6 m ² |
| Diameter | 7 cm (2.75 inches) |
| Length | Nominal 10", 20", 30" and 40" |


Quality System ISO 9001:2000

Betafine PEG Series filter cartridges are manufactured under an ISO 9001:2000 certified quality system. The quality system ensures that appropriate standards are met or exceeded to provide consistent, high quality products.

The Betafine PEG Series Filtration Advantage

A recirculating electroless nickel plating bath can be optimised with Betafine PEG Series filters. For high density memory devices, particle defects can be safely controlled with in-line 0.6 µm filtration. By replacing a 0.6 µm absolute rated competitive cartridge with an equally retentive Betafine PEG Series filter, the pressure drop can be reduced by one half, providing the flexibility to increase the flow through the bath by a factor of 4. With the Betafine PEG Series filters, the bath will clean up more efficiently after the high density devices are introduced into the plating solution. Betafine PEG Series filters effectively remove the contaminating particles while maintaining or increasing process yields. Product throughput in this critical process step can be increased and filter change-out frequency reduced, a direct result of the 60% surface area increase - only available with the Betafine PEG Series filter's APT technology.

Serial filtration was employed in this ambient temperature acid transfer, with a 10 µm Betafine PEG Series prefilter prior to a 1.2 µm Betafine PEG Series final filter. The low initial pressure drop and graded-density construction of the Betafine PEG Series filter allowed the process to run for extended periods before filter plugging. This optimised filtration scheme delivered premium quality acid with very low particle counts.

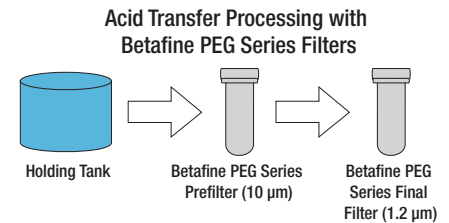

Electronics and Chemicals Applications

Today's electronics manufacturing and chemicals processing demand ever increasing levels of filtration efficiency and filtrate purity. Betafine PEG Series cartridge filters provide the answer for a broad range of applications.

Pre-reverse osmosis (Pre-RO)

- Pre-RO water filtration requires robust cartridges with long life to protect expensive RO membranes from seasonal fluctuations and process upsets. Low particle count ultrapure water is necessary at multiple points in every defect-sensitive production facility.

Plating and cleaning baths

- Plating and cleaning baths must maintain very low particle counts, despite constant contaminant addition, to provide the highest yields.

Multi-layer board processes

- Complex multi-layer board processes need an economical filter capable of high throughputs and extended lifetimes. Heavy contaminant loads must be handled without premature plugging of the filter.

Fine chemical production

- Fine chemical production demands economical, rigorous filter cartridges with long service life. Betafine PEG Series filter cartridges are compatible with a wide range of process chemicals.

Durable polypropylene construction provides superior chemical and mechanical compatibility under the most severe service conditions. Proper cartridge selection for individual process conditions sized for low initial pressure drop will ultimately extend cartridge lifetime and compatibility.

Applications Support - SASS

3M Purification's Scientific Applications Support Services (SASS) is staffed by scientists and engineers, with state-of-the-art laboratory facilities. The SASS staff, familiar with a wide range of filtration and separation applications, work closely with the customer to recommend the most effective and economical 3M Purification filtration systems.

Betafine PEG Series Filter Cartridge Ordering Guide

| Model | Absolute Rating*** | Configuration | Nominal Length | End Modification | Gasket/O-ring Material |
|-------|---|-----------------------------|--|--|---|
| PEG | 020 : 0.2 µm 060 : 0.6 µm 120 : 1.2 µm 250 : 2.5 µm 500 : 5.0 µm 10C : 10.0 µm | B - Cartridge 2.8" (7.1 cm) | 01 : 10" 02 : 20" 03 : 30" 04 : 40" | B - 226 O-ring with spear C - 222 O-ring with spear D - DOE flat gasket (10") E - DOE flat gasket (9 ¾") F - 222 O-ring with Flat Cap | A - Silicone B - Fluorocarbon C - EPR D - Nitrile H - Clear silicone |

* Retention ratings determined by modified ASTM STP 975. The 0.2 micron rating has been extrapolated. For more information, contact your 3M Purification representative.

Note: Betafine PEG Series is the new name for PolyPro XL Industrial.

Important Notice

3M Purification MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Since a variety of factors can affect the use and performance of a 3M Purification product in a particular application, some of which are uniquely within the user's knowledge and control, user is responsible for determining whether or not the 3M Purification product is fit for a particular purpose and suitable for user's method of application.

Limited Warranty

3M Purification warrants it this product to be free from defects in material and workmanship during normal use for a period of one (1) year from the date of shipment from the factory. If the Product(s) is (are) defective within this warranty period, your exclusive remedy and 3M Purification's sold obligations shall be, at 3M Purification's option, to replace or repair the Product(s) or refund the original purchase price of the Product(s). This warranty does not apply to failures that result from abuse, misuse, alternation or damage not caused by 3M Purification or failure to properly follow installation and use instructions.

Limitation of Liability: 3M Purification will not be liable for any loss or damage arising from the use of the Product(s), whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you.

This warranty gives you specific legal rights and you may have other rights which vary from state to state, or country to country.

3M, Betafine and APT are registered trademarks of 3M Company used under license.



LENNTECH

info@lennotech.com Tel. +31-152-610-900
 www.lennotech.com Fax. +31-152-616-289

Data may be subject to change without further notice.

© 3M 2010. All rights reserved.

DOC10098

LITCTBFPEG1.EU - 0810

The below 3M Cuno Bettafine PEG-series cartridge filters are all the models that are potentially possible in all variations. Please note that not all models are actually produced or on stock and some model numbers and names have become obsolete. Nevertheless this should help as cross reference table chart for Cuno filters nomenclature.

Bettafine PEG series

| | | | | | |
|-------------|------------|-------------|-------------|-------------|-------------|
| PEG020B01BA | PEG60B01BA | PEG120B01BA | PEG250B01BA | PEG500B01BA | PEG10CB01BA |
| PEG020B01BB | PEG60B01BB | PEG120B01BB | PEG250B01BB | PEG500B01BB | PEG10CB01BB |
| PEG020B01BC | PEG60B01BC | PEG120B01BC | PEG250B01BC | PEG500B01BC | PEG10CB01BC |
| PEG020B01BD | PEG60B01BD | PEG120B01BD | PEG250B01BD | PEG500B01BD | PEG10CB01BD |
| PEG020B01BH | PEG60B01BH | PEG120B01BH | PEG250B01BH | PEG500B01BH | PEG10CB01BH |
| PEG020B01CA | PEG60B01CA | PEG120B01CA | PEG250B01CA | PEG500B01CA | PEG10CB01CA |
| PEG020B01CB | PEG60B01CB | PEG120B01CB | PEG250B01CB | PEG500B01CB | PEG10CB01CB |
| PEG020B01CC | PEG60B01CC | PEG120B01CC | PEG250B01CC | PEG500B01CC | PEG10CB01CC |
| PEG020B01CD | PEG60B01CD | PEG120B01CD | PEG250B01CD | PEG500B01CD | PEG10CB01CD |
| PEG020B01CH | PEG60B01CH | PEG120B01CH | PEG250B01CH | PEG500B01CH | PEG10CB01CH |
| PEG020B01DA | PEG60B01DA | PEG120B01DA | PEG250B01DA | PEG500B01DA | PEG10CB01DA |
| PEG020B01DB | PEG60B01DB | PEG120B01DB | PEG250B01DB | PEG500B01DB | PEG10CB01DB |
| PEG020B01DC | PEG60B01DC | PEG120B01DC | PEG250B01DC | PEG500B01DC | PEG10CB01DC |
| PEG020B01DD | PEG60B01DD | PEG120B01DD | PEG250B01DD | PEG500B01DD | PEG10CB01DD |
| PEG020B01DH | PEG60B01DH | PEG120B01DH | PEG250B01DH | PEG500B01DH | PEG10CB01DH |
| PEG020B01EA | PEG60B01EA | PEG120B01EA | PEG250B01EA | PEG500B01EA | PEG10CB01EA |
| PEG020B01EB | PEG60B01EB | PEG120B01EB | PEG250B01EB | PEG500B01EB | PEG10CB01EB |
| PEG020B01EC | PEG60B01EC | PEG120B01EC | PEG250B01EC | PEG500B01EC | PEG10CB01EC |
| PEG020B01ED | PEG60B01ED | PEG120B01ED | PEG250B01ED | PEG500B01ED | PEG10CB01ED |
| PEG020B01EH | PEG60B01EH | PEG120B01EH | PEG250B01EH | PEG500B01EH | PEG10CB01EH |
| PEG020B01FA | PEG60B01FA | PEG120B01FA | PEG250B01FA | PEG500B01FA | PEG10CB01FA |
| PEG020B01FB | PEG60B01FB | PEG120B01FB | PEG250B01FB | PEG500B01FB | PEG10CB01FB |
| PEG020B01FC | PEG60B01FC | PEG120B01FC | PEG250B01FC | PEG500B01FC | PEG10CB01FC |
| PEG020B01FD | PEG60B01FD | PEG120B01FD | PEG250B01FD | PEG500B01FD | PEG10CB01FD |
| PEG020B01FH | PEG60B01FH | PEG120B01FH | PEG250B01FH | PEG500B01FH | PEG10CB01FH |
| PEG020B02BA | PEG60B02BA | PEG120B02BA | PEG250B02BA | PEG500B02BA | PEG10CB02BA |
| PEG020B02BB | PEG60B02BB | PEG120B02BB | PEG250B02BB | PEG500B02BB | PEG10CB02BB |
| PEG020B02BC | PEG60B02BC | PEG120B02BC | PEG250B02BC | PEG500B02BC | PEG10CB02BC |
| PEG020B02BD | PEG60B02BD | PEG120B02BD | PEG250B02BD | PEG500B02BD | PEG10CB02BD |
| PEG020B02BH | PEG60B02BH | PEG120B02BH | PEG250B02BH | PEG500B02BH | PEG10CB02BH |
| PEG020B02CA | PEG60B02CA | PEG120B02CA | PEG250B02CA | PEG500B02CA | PEG10CB02CA |
| PEG020B02CB | PEG60B02CB | PEG120B02CB | PEG250B02CB | PEG500B02CB | PEG10CB02CB |
| PEG020B02CC | PEG60B02CC | PEG120B02CC | PEG250B02CC | PEG500B02CC | PEG10CB02CC |
| PEG020B02CD | PEG60B02CD | PEG120B02CD | PEG250B02CD | PEG500B02CD | PEG10CB02CD |
| PEG020B02CH | PEG60B02CH | PEG120B02CH | PEG250B02CH | PEG500B02CH | PEG10CB02CH |
| PEG020B02DA | PEG60B02DA | PEG120B02DA | PEG250B02DA | PEG500B02DA | PEG10CB02DA |
| PEG020B02DB | PEG60B02DB | PEG120B02DB | PEG250B02DB | PEG500B02DB | PEG10CB02DB |
| PEG020B02DC | PEG60B02DC | PEG120B02DC | PEG250B02DC | PEG500B02DC | PEG10CB02DC |
| PEG020B02DD | PEG60B02DD | PEG120B02DD | PEG250B02DD | PEG500B02DD | PEG10CB02DD |
| PEG020B02DH | PEG60B02DH | PEG120B02DH | PEG250B02DH | PEG500B02DH | PEG10CB02DH |
| PEG020B02EA | PEG60B02EA | PEG120B02EA | PEG250B02EA | PEG500B02EA | PEG10CB02EA |
| PEG020B02EB | PEG60B02EB | PEG120B02EB | PEG250B02EB | PEG500B02EB | PEG10CB02EB |
| PEG020B02EC | PEG60B02EC | PEG120B02EC | PEG250B02EC | PEG500B02EC | PEG10CB02EC |
| PEG020B02ED | PEG60B02ED | PEG120B02ED | PEG250B02ED | PEG500B02ED | PEG10CB02ED |
| PEG020B02EH | PEG60B02EH | PEG120B02EH | PEG250B02EH | PEG500B02EH | PEG10CB02EH |
| PEG020B02FA | PEG60B02FA | PEG120B02FA | PEG250B02FA | PEG500B02FA | PEG10CB02FA |
| PEG020B02FB | PEG60B02FB | PEG120B02FB | PEG250B02FB | PEG500B02FB | PEG10CB02FB |
| PEG020B02FC | PEG60B02FC | PEG120B02FC | PEG250B02FC | PEG500B02FC | PEG10CB02FC |
| PEG020B02FD | PEG60B02FD | PEG120B02FD | PEG250B02FD | PEG500B02FD | PEG10CB02FD |
| PEG020B02FH | PEG60B02FH | PEG120B02FH | PEG250B02FH | PEG500B02FH | PEG10CB02FH |
| PEG020B03BA | PEG60B03BA | PEG120B03BA | PEG250B03BA | PEG500B03BA | PEG10CB03BA |
| PEG020B03BB | PEG60B03BB | PEG120B03BB | PEG250B03BB | PEG500B03BB | PEG10CB03BB |
| PEG020B03BC | PEG60B03BC | PEG120B03BC | PEG250B03BC | PEG500B03BC | PEG10CB03BC |
| PEG020B03BD | PEG60B03BD | PEG120B03BD | PEG250B03BD | PEG500B03BD | PEG10CB03BD |
| PEG020B03BH | PEG60B03BH | PEG120B03BH | PEG250B03BH | PEG500B03BH | PEG10CB03BH |
| PEG020B03CA | PEG60B03CA | PEG120B03CA | PEG250B03CA | PEG500B03CA | PEG10CB03CA |
| PEG020B03CB | PEG60B03CB | PEG120B03CB | PEG250B03CB | PEG500B03CB | PEG10CB03CB |
| PEG020B03CC | PEG60B03CC | PEG120B03CC | PEG250B03CC | PEG500B03CC | PEG10CB03CC |
| PEG020B03CD | PEG60B03CD | PEG120B03CD | PEG250B03CD | PEG500B03CD | PEG10CB03CD |
| PEG020B03CH | PEG60B03CH | PEG120B03CH | PEG250B03CH | PEG500B03CH | PEG10CB03CH |
| PEG020B03DA | PEG60B03DA | PEG120B03DA | PEG250B03DA | PEG500B03DA | PEG10CB03DA |
| PEG020B03DB | PEG60B03DB | PEG120B03DB | PEG250B03DB | PEG500B03DB | PEG10CB03DB |
| PEG020B03DC | PEG60B03DC | PEG120B03DC | PEG250B03DC | PEG500B03DC | PEG10CB03DC |
| PEG020B03DD | PEG60B03DD | PEG120B03DD | PEG250B03DD | PEG500B03DD | PEG10CB03DD |
| PEG020B03DH | PEG60B03DH | PEG120B03DH | PEG250B03DH | PEG500B03DH | PEG10CB03DH |
| PEG020B03EA | PEG60B03EA | PEG120B03EA | PEG250B03EA | PEG500B03EA | PEG10CB03EA |
| PEG020B03EB | PEG60B03EB | PEG120B03EB | PEG250B03EB | PEG500B03EB | PEG10CB03EB |
| PEG020B03EC | PEG60B03EC | PEG120B03EC | PEG250B03EC | PEG500B03EC | PEG10CB03EC |
| PEG020B03ED | PEG60B03ED | PEG120B03ED | PEG250B03ED | PEG500B03ED | PEG10CB03ED |
| PEG020B03EH | PEG60B03EH | PEG120B03EH | PEG250B03EH | PEG500B03EH | PEG10CB03EH |
| PEG020B03FA | PEG60B03FA | PEG120B03FA | PEG250B03FA | PEG500B03FA | PEG10CB03FA |
| PEG020B03FB | PEG60B03FB | PEG120B03FB | PEG250B03FB | PEG500B03FB | PEG10CB03FB |
| PEG020B03FC | PEG60B03FC | PEG120B03FC | PEG250B03FC | PEG500B03FC | PEG10CB03FC |
| PEG020B03FD | PEG60B03FD | PEG120B03FD | PEG250B03FD | PEG500B03FD | PEG10CB03FD |
| PEG020B03FH | PEG60B03FH | PEG120B03FH | PEG250B03FH | PEG500B03FH | PEG10CB03FH |
| PEG020B04BA | PEG60B04BA | PEG120B04BA | PEG250B04BA | PEG500B04BA | PEG10CB04BA |
| PEG020B04BB | PEG60B04BB | PEG120B04BB | PEG250B04BB | PEG500B04BB | PEG10CB04BB |
| PEG020B04BC | PEG60B04BC | PEG120B04BC | PEG250B04BC | PEG500B04BC | PEG10CB04BC |
| PEG020B04BD | PEG60B04BD | PEG120B04BD | PEG250B04BD | PEG500B04BD | PEG10CB04BD |
| PEG020B04BH | PEG60B04BH | PEG120B04BH | PEG250B04BH | PEG500B04BH | PEG10CB04BH |
| PEG020B04CA | PEG60B04CA | PEG120B04CA | PEG250B04CA | PEG500B04CA | PEG10CB04CA |
| PEG020B04CB | PEG60B04CB | PEG120B04CB | PEG250B04CB | PEG500B04CB | PEG10CB04CB |
| PEG020B04CC | PEG60B04CC | PEG120B04CC | PEG250B04CC | PEG500B04CC | PEG10CB04CC |
| PEG020B04CD | PEG60B04CD | PEG120B04CD | PEG250B04CD | PEG500B04CD | PEG10CB04CD |
| PEG020B04CH | PEG60B04CH | PEG120B04CH | PEG250B04CH | PEG500B04CH | PEG10CB04CH |
| PEG020B04DA | PEG60B04DA | PEG120B04DA | PEG250B04DA | PEG500B04DA | PEG10CB04DA |
| PEG020B04DB | PEG60B04DB | PEG120B04DB | PEG250B04DB | PEG500B04DB | PEG10CB04DB |
| PEG020B04DC | PEG60B04DC | PEG120B04DC | PEG250B04DC | PEG500B04DC | PEG10CB04DC |
| PEG020B04DD | PEG60B04DD | PEG120B04DD | PEG250B04DD | PEG500B04DD | PEG10CB04DD |
| PEG020B04DH | PEG60B04DH | PEG120B04DH | PEG250B04DH | PEG500B04DH | PEG10CB04DH |
| PEG020B04EA | PEG60B04EA | PEG120B04EA | PEG250B04EA | PEG500B04EA | PEG10CB04EA |
| PEG020B04EB | PEG60B04EB | PEG120B04EB | PEG250B04EB | PEG500B04EB | PEG10CB04EB |
| PEG020B04EC | PEG60B04EC | PEG120B04EC | PEG250B04EC | PEG500B04EC | PEG10CB04EC |
| PEG020B04ED | PEG60B04ED | PEG120B04ED | PEG250B04ED | PEG500B04ED | PEG10CB04ED |
| PEG020B04EH | PEG60B04EH | PEG120B04EH | PEG250B04EH | PEG500B04EH | PEG10CB04EH |
| PEG020B04FA | PEG60B04FA | PEG120B04FA | PEG250B04FA | PEG500B04FA | PEG10CB04FA |
| PEG020B04FB | PEG60B04FB | PEG120B04FB | PEG250B04FB | PEG500B04FB | PEG10CB04FB |
| PEG020B04FC | PEG60B04FC | PEG120B04FC | PEG250B04FC | PEG500B04FC | PEG10CB04FC |
| PEG020B04FD | PEG60B04FD | PEG120B04FD | PEG250B04FD | PEG500B04FD | PEG10CB04FD |
| PEG020B04FH | PEG60B04FH | PEG120B04FH | PEG250B04FH | PEG500B04FH | PEG10CB04FH |