

DAB pump MULTI INOX

SEL-PRIMING HORIZONTAL MULTISTAGE PUMPS



DOMESTIC WATER SUPPLY



Self-priming multistage pumps ideal for water supply in domestic and garden applications. High performances. Available with 3 - 4 - 5 **impellers in AISI 304 stainless steel**.
Materials resistant to corrosion and oxidation.
Motor with thermal overload protection.
Double insulation between motor and hydraulic section.

Optimal resistance to low temperatures.
Supplied complete with power cable and plug.
Liquid temperature range:
from 0°C to +35°C (for domestic use)
(EN 60335-2-41)
from 0°C to +40°C (for other uses).



TECHNICAL DATA

MODEL	CODE	N° IMPELLERS	ELECTRICAL DATA						
			VOLTAGE 50 Hz	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
					kW	HP		µF	Vc
MULTI INOX 3 M	60122692	3	1x220-240V ~	0,80	0,55	0,75	3,7	12,5	450
MULTI INOX 4 M	60122693	4	1x220-240V ~	1,00	0,75	1	4,5	16	450
MULTI INOX 5 M	60122694	5	1x220-240V ~	1,25	1	1,36	5,5	20	450

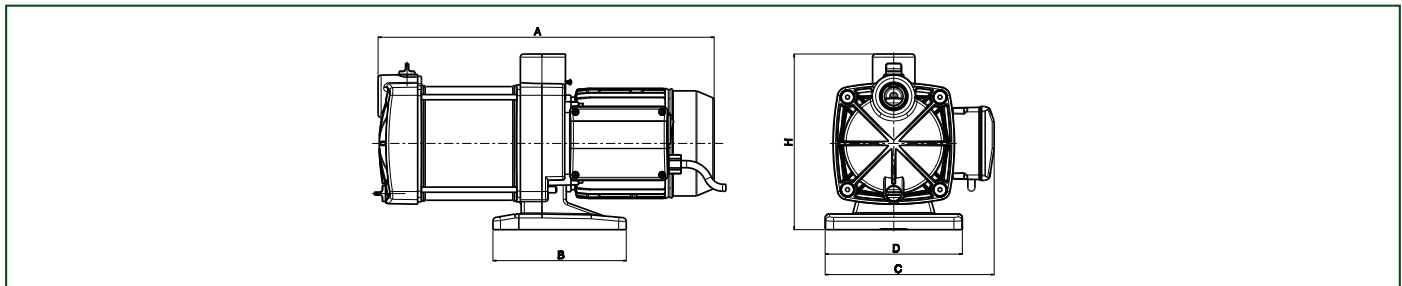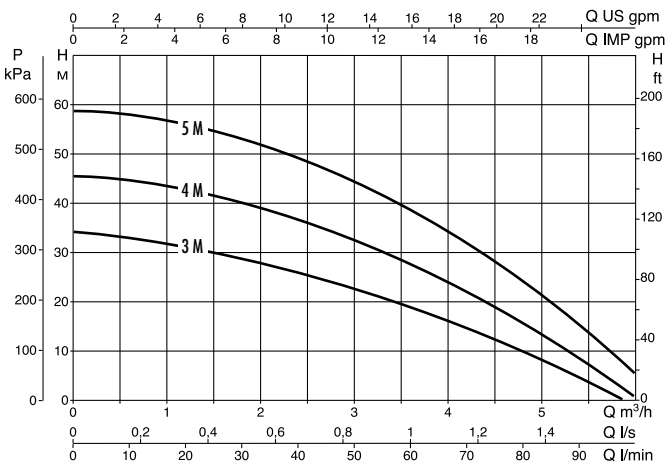

MODEL	A	B	C	D	H	PACKAGING DIMENSIONS			WEIGHT Kg	Q.TY x PALLET
						L/A	L/B	H		
MULTI INOX 3 M	380	170	215	175	220	460	230	270	8,8	21
MULTI INOX 4 M	430	170	215	175	220	460	230	270	11,3	21
MULTI INOX 5 M	455	170	215	175	220	460	230	270	12,5	21