

**DOWEX MARATHON WBA-2**Uniform Particle Size, High Capacity, Weak Base Anion Exchange Resin for Water
Demineralization Applications

Product	Type	Matrix	Functional group
DOWEX™ MARATHON™ WBA-2	Weak base anion	Styrene-DVB, macroporous	Tertiary amine

Guaranteed Sales Specifications		FB (free base) form
Total exchange capacity, min.	eq/L kgr/ft ³ as CaCO ₃	1.7 37.1
Water content	%	40 - 51
Uniformity coefficient, max.		1.1

Typical Physical and Chemical Properties		FB (free base) form
Mean particle size†	µm	550 ± 50
Whole beads	%	95 - 100
Total swelling (FB → HCl)	%	30
Particle density	g/mL	1.04
Shipping weight	g/L lbs/ft ³	640 40

Recommended Operating Conditions

- Maximum operating temperature 100°C (212°F)
- pH range 0 - 7
- Bed depth, min. 800 mm (2.6 ft)
- Flow rates:
 - Service/fast rinse 5 - 30 m/h (2 - 12 gpm/ft²)
 - Backwash See figure 1
 - Co-current regeneration/displacement rinse 1 - 10 m/h (0.4 - 4 gpm/ft²)
 - Counter-current regeneration/displacement rinse 5 - 20 m/h (2 - 8 gpm/ft²)
- Total rinse requirement 2 - 4 bed volumes
- Regenerant 2 - 5% NaOH

† For additional particle size information, please refer to Particle Size Distribution Cross Reference Chart (Form No. 177-01775)

Typical properties and applications

DOWEX™ MARATHON™ WBA-2 resin is a macroporous, weak base anion resin of narrow bead size distribution that has very high exchange capacity and physical durability. The small uniform bead size yields significantly higher throughput capacity than macroporous weak base resins with conventional polydispersed bead size distribution. When operated at moderate co-current demineralization flow rates, this resin offers excellent operating capacity, particularly with feed containing high alkalinity (undegassed). This means more water can be produced per regeneration so regeneration costs are minimized. DOWEX MARATHON WBA-2 resin is especially well suited for use with strong base resins. It effectively removes mineral acids (formed by Cl⁻ and SO₄⁻²) and organics, reducing the ionic load on the strong base anion and protecting it from organic fouling.

Packaging

25 liter bags or 5 cubic foot fiber drums

Figure 1. Backwash Expansion Data

Temperature = 25° C (77° F)

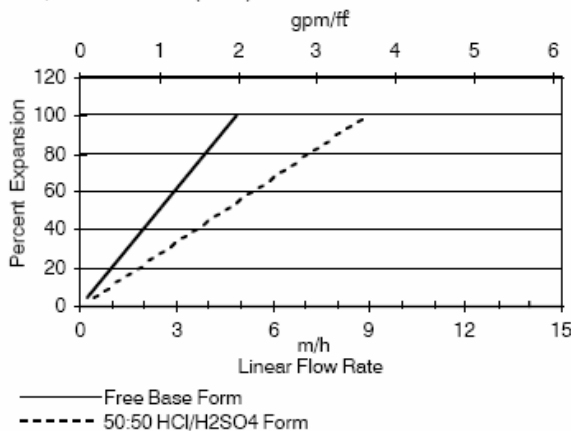


Figure 2. Pressure Drop Data

For other temperatures use:

$$F_T = F_{77°F} [1 + 0.008 (T_F - 77)], \text{ where } F \equiv \text{gpm/ft}^2$$

$$F_T = F_{25°C} [1 + 0.008 (1.8T_C - 45)], \text{ where } F \equiv \text{m/h}$$

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" mean the Dow legal entity selling products to Customer unless otherwise expressly noted. Any claim for breach of warranty may only be brought against the Dow legal entity selling products to Customer. The applicable law governing this document shall be the law set forth in Dow's general terms and conditions or as otherwise agreed to by the parties for the sale of products. For sales governed by German law, a "Limited Warranty" will not be granted. NO WARRANTIES ARE GIVEN EXCEPT FOR ANY SPECIFIC WARRANTY SET FORTH HEREIN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

