

AQUADYN® UE1060

- Hollow Fiber Module -

Data Sheet

Module Specification

Filtration type	Ultrafiltration
Membrane type	Hollow fiber
Membrane structure	Double asymmetric
Membrane potting	Epoxy
Membrane material	PES
Housing material	uPVC
Fiber arrangement	U-Shape
Flow type	Out/In
Type of filtration	Dead End
Regeneration	Back Flush, Forward Flush, Air Scouring
Membrane area	55 m ² /592 ft ²
Hollow fiber diameter OD/ID	1.55 mm/0.95 mm
Pore size	0.025 µm
Module diameter	267 mm/10.5 in
Module length	1737 mm/68.4 in
Connectors	Feed port: 2" Victaulic Permeate port: 2" Victaulic Reject port: 2" Victaulic Air inlet port: G1/2"
Weight of module at shipping	Approx. 41 kg/90.4 lbs
Standard preservative	Ethanol + Glycerine


Operation Specification*

	SI Units	US Units
Applicable water flux	≤ 6.6 m ³ /h	≤ 29.1 gpm
Capacity feed pump	≤ 13.2 m ³ /h	≤ 58.1 gpm
Capacity back flush pump	≤ 13.2 m ³ /h	≤ 58.1 gpm
Max. transmembrane pressure	1 bar	14.5 psi
Max. module pressure	1.2 bar	17.4 psi
Applicable air scour rate	3 - 10 Nm ³ /h	1.8 - 5.9s cfm
Air pressure	<1.2 bar	<17.4 psi
Temperature range	5 - 45°C	41 - 113°F
pH range, operation	2 - 12	
pH range, cleaning	1 - 13	
Max. TSS feed	≤ 350 mg/L	
Max. NTU feed	≤ 300 NTU	

* Depending on feed water quality and operating conditions

Note: The information in this data sheet believed to be accurate and reliable, but is not to be construed as implying any warranty or guarantee of performance

MANN+HUMMEL ULTRA-FLO Pte Ltd. Is the manufacturer of the UE & UA modules: the modules are marketed and distributed under the name AQUADYN® which is a registered trademark of MICRODYN-NADIR GmbH in Europe.

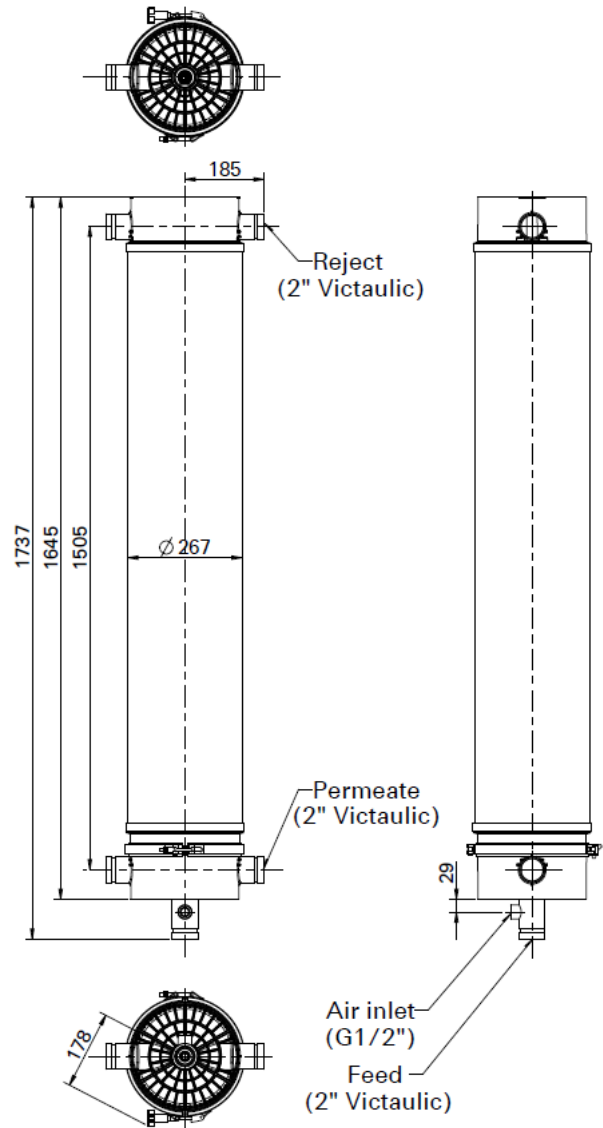

MICRODYN-NADIR behält sich das Recht vor, Angaben ohne vorherige Ankündigung anzupassen.
We reserve the right to change specifications without prior notification.

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

