



FILTER CARTRIDGES

SX, BX, CX

Extensive range of filter cartridges for every application in water filtration and water treatment, made with the most appropriate filtering and treatment media.

- **SX cartridges** fit to standard Atlas Filtri SX housings, as well as most standard housings available from the market.
- **Exclusive BX and CX cartridges with double o-ring collar** fit to proprietary Atlas Filtri BX and CX housings, DP housings, K housings, Depural Top housings.

The cartridges standard heights range from 4" to 50", depending on model and configuration.

The standard filter rates range from Ultra-filtration at 0.02 micron to nominal filtration at 100 micron, providing any kind of filtration requirement. The standard treatment media are made from Granular Activated Carbon (GAC), Carbon Block, Polyphosphate, Ionic Exchange Resins.

Custom made heights, filter rates, treatment media are available on request. Atlas Filtri cartridges are manufactured with the finest and most advanced materials under constant focus on innovative processing technologies and ceaseless modernization to ensure the absolute quality of our products.

A wide range of cartridges are certified under the most stringent certification procedures and standards: TIFQ (Italy), ACS (France), GOST (Russia).

Dedicated accessories are available on demand: FilterFit, centering device which holds cartridges perfectly standing inside DP housings; Containing Sponge, designed to hold in place treatment media for the filling of P type empty cartridges (containers).

CARTRIDGES CONFIGURATION

FOR FILTERS SX, BX, CX

Atlas Filtri® cartridges are available in a wide range of end-caps configurations to provide:

- the widest compatibility to housings for cartridges with standard configuration SX with flat seals and double open end (DOE). The major part of housings in the market are suitable to this standard.
- a range of quick-fit double o-ring cartridges with proprietary configurations BX, AX, CX to ensure: perfect watertight fit, safer for micro-filtration; simple and rapid maintenance operations; perfect cartridge standing and elimination of wrong positioning; market exclusivity.



SX

Standard double open end (DOE) configuration with flat seals.

Fit to SX housings, DP housings, Depural®, Depural® Top, Bravo DP, Oasis DP.



BX

Quick-fit configuration with 45 mm double o-ring collar.

Fit to Plus 3P BX housings, DP housings, K Plus 3P housings, Depural® Top, Bravo DP, Oasis DP.



CX

Quick-fit configuration with 57 mm double o-ring collar.

Fit to Plus 3P CX and K DP housings.

CERTIFICATIONS



The products are tested and certified under the most stringent procedures worldwide, achieving the sanitary certification GOST (Russia).

TERMS LEGEND

Filtration

Filter rate in micron.

Flow rate

In liters per hour (l/h), the flow rate for ideal filtration using a new cartridge.

Average life-span

The average working life of the cartridge. Working life depends on the type of application, and on the level of filtration, the cartridge material, the type of maintenance that can be carried out and, especially, depends on the quality of the water being treated. The quality of the water is an extremely variable factor and thus the average life-span is indicated for a mains water supply with average European potable water characteristics.

Maintenance

Type and frequency of applicable maintenance operations.

WATER TREATMENT PRODUCTS BULK

Polyphosphate crystals 10/20

- 0,5 Kg pack
- 1,5 Kg pack
- 25 kg pack

Polyphosphate crystals 6/10

- 0,5 Kg pack
- 1,5 Kg pack
- 25 kg pack

Granular activated carbon

- 0,3 kg pack
- 20 kg pack

Strong cationic resin (softening)

- 25 litres pack

Strong anionic resin (anti-nitrates)

- 25 litres pack

Mixed bed resin (demineralisation)

- 25 litres pack

SYMBOLS LEGEND



For domestic use



For technical and industrial use



CB-EC cartridges are the only environmentally friendly carbon block element, made with a proprietary technology reducing green house gas emissions in activated carbon production.

CARTRIDGES RANGE

Cartridges for mechanical filtration

WASHABLE CARTRIDGES

- RL** - polyester net. Filtration 50 micron.
- RL C** - polyester net. Filtration 50 micron.
- RL A** - stainless steel net. Filtration 70 micron.
- RS** - polyester net. Filtration 50 micron.
- RA** - stainless steel net. Filtration 70 micron.
- SA** - stainless steel net. Filtration 50 micron.

FILTRATION IN DEPTH

- FA** - wound polypropylene thread. Filtration from 1 to 100 micron.
- FA HOT** - wound polypropylene thread with special inner core, for hot water. Filtration from 1 to 100 micron.
- CPP** - melt-blown polypropylene smooth.
- PP** - melt-blown polypropylene grooved.
- TS** - polyester fabric. Filtration 50 micron.
- CS** - special paper. Filtration 25 micron.
- GA** - quartzite. Filtration 10 micron.
- AB** - ceramic. Filtration 0,45 micron.
- AC** - polypropylene-borosilicate multi-layer. Filtration 0,2 micron and 0,45 micron.

Cartridges for water treatment

GRANULAR ACTIVATED CARBON

Reduction of chlorine, taste, odour (CTO); volatile organic compounds (VOC) pesticides, insecticides, chlorinated organic compounds.

GRANULAR ACTIVATED CARBON

LA - granular activated carbon from coconut shell.

GRANULAR ACTIVATED CARBON AND FILTER MEDIUM

FA-CA - wound polypropylene thread. Filtration from 5 to 100 micron. Granular activated carbon from coconut shell.

CA - melt-blown polypropylene. Filtration 25 micron. Granular activated carbon from coconut shell.

BT CPP LA - melt-blown polypropylene. Filtration from 1 to 50 micron. Granular activated carbon from coconut shell.

ACTIVATED CARBON BLOCK

Reduction of chlorine, taste, odour (CTO); volatile organic compounds (VOC) pesticides, insecticides, chlorinated organic compounds, heavy metals (Pb), bacteria and virus.

CA SE - activated carbon block from coconut shell. Filtration from 0,3 to 5 micron.

CA-SE HF - activated carbon block from coconut shell and hollow-fiber membranes. Filtration 0,15 and 0.02 micron. Antibacterial.

CB-EC - activated carbon block from coconut shell. Filtration from 1 to 10 micron.

POLYPHOSPHATE CRYSTALS

Anti-scale treatment

HA - polyphosphate crystals suitable for drinking water when used with Dosaprop proportional dosing systems, in compliance with UE Directive 80/778.

BT CPP HA - melt-blown polypropylene. Filtration from 1 to 50 micron. Polyphosphate crystals suitable for drinking water when used with Dosaprop proportional dosing systems, in compliance with UE Directive 98/83/CE.

BT RL HA - polyester net. Filtration 50 micron. Polyphosphate crystals suitable for drinking water when used with Dosaprop proportional dosing systems, in compliance with UE Directive 98/83/CE.

FA HA - wound polypropylene thread. Filtration from 5 to 100 micron. Polyphosphate crystals suitable for drinking water when used with Dosaprop proportional dosing systems, in compliance with UE Directive 98/83/CE.

CPP HA - melt-blown polypropylene. Filtration 5 and 25 micron. Polyphosphate crystals suitable for drinking water when used with Dosaprop proportional dosing systems, in compliance with UE Directive 98/83/CE.

IONIC EXCHANGE RESINS

QA CF - cationic resin. Reduction of total hardness.

QA AF - anionic resin. Reduction of nitrates.

QA LM - mixed bed of cationic and anionic resins. Demineralization.

EMPTY CONTAINERS

P - containers to be filled up with water treatment products.



CPP melt-blown polypropylene

WORKING CONDITIONS

Max working temperature _____ 80°C (176°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
Filter medium: polypropylene.


Sediment filtration.
Average life-span: 3-6 months.
Maintenance: none.

Atlas Filtri high efficiency melt-blown polypropylene cartridges are manufactured in specific plant which includes the standardization of production with dedicated software at every process' stage, thermal insulation at controlled temperature, full automation of the whole production line, from the raw-material loading to the finished product packing, without operator direct contact with the product, granting full hygienic safety. Certified raw materials, high productivity and quick delivery time, flexibility of production and custom made products complete the benefits of the range.

The range is made of 2 main versions: CPP smooth cartridges, height from 4" to 60", and PP grooved cartridges, height 10" and 20", available also as IC models with polypropylene inner core and as IC/E models with inner core and end-caps in various configurations.

CPP and PP cartridges are made to comply with the most stringent regulations for applications in drinking water.

Polypropylene is suitable to many industrial applications due to its wide chemical-physical compatibility to a variety of water-based solutions.

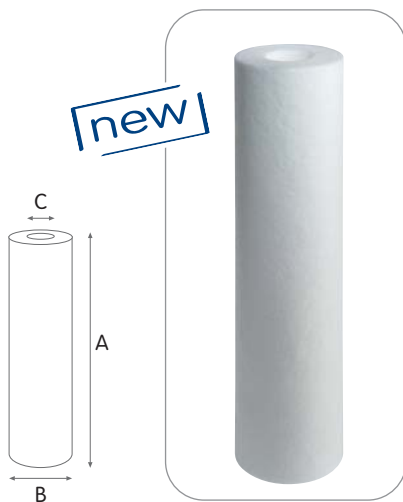

CPP and PP are available in a variety of:

CONFIGURATIONS:

- SX standard configuration double open end (DOE) available for every height and diameter.
- BX proprietary configuration with double o-ring collar 45 mm, suitable to PLUS 3P BX housings, DP housings, K PLUS 3P housings.

Other end-caps configurations (code C8, C7, P8) available on demand by minimum quantity.

MODELS:

- CPP MIGNON series 5" M OD 1.77" ID 0.71, SX configuration, available on demand by minimum quantity.
- CPP series from 4" to 60" OD 2.40" ID 1.10", SX, BX, CX configurations, other end-caps configurations available on demand by minimum quantity.
- PP series 10" and 20" OD 2.40" ID 1.10", SX, BX, CX configurations, other end-caps configurations available on demand by minimum quantity.

Variants available on minimum quantity:

- CPP CX and PP CX with double o-ring collar 57 mm, suitable to PLUS 3P CX, K DP housings.
- CPP-R series 10" and 20" OD 2.20" ID 1.10", SX configuration.

CPP SX

POLYPROPYLENE MELT-BLOWN SMOOTH CARTRIDGES WITH DOUBLE OPEN END (DOE)

CODE	MODEL	NOMINAL HEIGHT	NOMINAL FILTRATION MICRON	NOMINAL FLOW/RATE l/h	DIMENSIONS MM		
					A	B	C
OD 2,40" x ID 1,10"							
RA5703506	CPP 4 SX 1 mcr	4"	1	800	92	61	28
RA5703508	CPP 4 SX 5 mcr	4"	5	800	92	61	28
RA5703509	CPP 4 SX 10 mcr	4"	10	800	92	61	28
RA5703511	CPP 4 SX 25 mcr	4"	25	800	92	61	28
RA5703514	CPP 4 SX 50 mcr	4"	50	800	92	61	28
RA5704506	CPP 5 SX 1 mcr	5"	1	1000	125	61	28
RA5704508	CPP 5 SX 5 mcr	5"	5	1000	125	61	28
RA5704509	CPP 5 SX 10 mcr	5"	10	1000	125	61	28
RA5704511	CPP 5 SX 25 mcr	5"	25	1000	125	61	28
RA5704514	CPP 5 SX 50 mcr	5"	50	1000	125	61	28
RA5705506	CPP 7 SX 1 mcr	7"	1	1400	173	61	28
RA5705508	CPP 7 SX 5 mcr	7"	5	1400	173	61	28
RA5705509	CPP 7 SX 10 mcr	7"	10	1400	173	61	28
RA5705511	CPP 7 SX 25 mcr	7"	25	1400	173	61	28
RA5705514	CPP 7 SX 50 mcr	7"	50	1400	173	61	28
RA5706506	CPP 10 SX 1 mcr	10"	1	2000	250	61	28
RA5706508	CPP 10 SX 5 mcr	10"	5	2000	250	61	28
RA5706509	CPP 10 SX 10 mcr	10"	10	2000	250	61	28
RA5706511	CPP 10 SX 25 mcr	10"	25	2000	250	61	28
RA5706514	CPP 10 SX 50 mcr	10"	50	2000	250	61	28
RA5706706	CPP 20 SX 1 mcr	20"	1	3000	505	61	28
RA5706708	CPP 20 SX 5 mcr	20"	5	3000	505	61	28
RA5706709	CPP 20 SX 10 mcr	20"	10	3000	505	61	28
RA5706711	CPP 20 SX 25 mcr	20"	25	3000	505	61	28
RA5706714	CPP 20 SX 50 mcr	20"	50	3000	505	61	28
RA5706806	CPP 30 SX 1 mcr	30"	1	4000	762	61	28
RA5706808	CPP 30 SX 5 mcr	30"	5	4000	762	61	28
RA5706809	CPP 30 SX 10 mcr	30"	10	4000	762	61	28
RA5706811	CPP 30 SX 25 mcr	30"	25	4000	762	61	28
RA5706814	CPP 30 SX 50 mcr	30"	50	4000	762	61	28
RA5708506	CPP 40 SX 1 mcr	40"	1	5000	1016	61	28
RA5708508	CPP 40 SX 5 mcr	40"	5	5000	1016	61	28
RA5708509	CPP 40 SX 10 mcr	40"	10	5000	1016	61	28
RA5708511	CPP 40 SX 25 mcr	40"	25	5000	1016	61	28
RA5708514	CPP 40 SX 50 mcr	40"	50	5000	1016	61	28
RA5709506	CPP 50 SX 1 mcr	50"	1	6000	1270	61	28
RA5709508	CPP 50 SX 5 mcr	50"	5	6000	1270	61	28
RA5709509	CPP 50 SX 10 mcr	50"	10	6000	1270	61	28
RA5709511	CPP 50 SX 25 mcr	50"	25	6000	1270	61	28
RA5709514	CPP 50 SX 50 mcr	50"	50	6000	1270	61	28

CERTIFICATIONS

In compliance with Italian regulation D.M. 174/2004

CPP cartridges are tested and certified under the most stringent procedures worldwide, achieving the certification of compliance with DM 174/2004.

LENNTECH

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289