

Product Description

Membrane material	Composite polyamide
Membrane type	ORM32K
Design	Spiral wound

Specification

Test conditions:
test solution of NaCl
1500 mg/l, P=1,0
MPa, T=25 °C, pH=7,5.
Recovery -15%

Flow of each single
element in a batch may
vary for +15% / -20%

Nominal rejection
is reached after 48
hours of continuous
operation on test
solution


Minimal rejection
of a new element after
20 minutes' test on
test solution

1)
During continuous
work with pH over 10
the temperature must
not exceed 35°C

Model	Flow*		Rejection normal**/ minimal***	Area		Spacer	
	l/hr	GPD		m2	ft2	mm	mil
KH 4040-C	380	2400	99,2/98,5	8,0	86	0,71	28

Operating conditions

Recommended operation pressure, MPa	0,9-1,2
Maximum operation pressure, MPa	4,1
Maximum pressure drop, MPa	0,1
Operation temperature, °C ¹⁾	4-45
pH at continuous operation at T<35°C	2-11
pH at continuous operation at T<45°C	3-10,5
Chemical cleaning, temperature, °C	T<45 T<35 T<25
CIP pH (short time operation)	2-11 1-11.5 1-12
Free chlorine content, mg/l max	0,1
Maximum feed flow, m3/hr	3.6
Concentrate/permeate ratio on each element, min	5:1
SDI (15 minutes test), max	5
Turbidity, NTU max	1

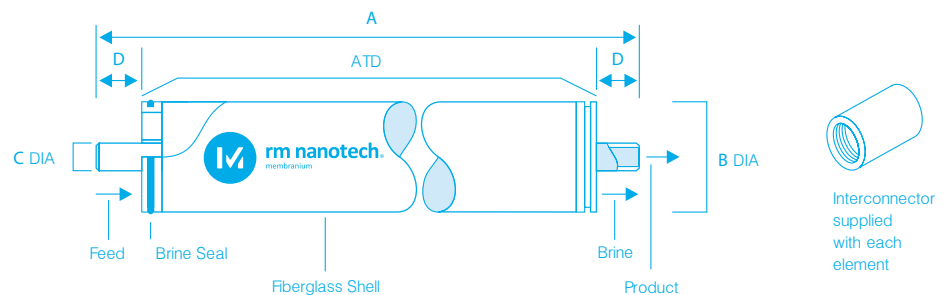

Model	A mm	B mm	B' (ATD) mm	C mm	D mm	Weight kg
KH 4040-C	1016	101.6	100.3	19,1	26.7	4.5

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289