

## Product Description

Membrane material	Composite polyamide
Membrane type	ORM45K
Design	Spiral wound

## Specification

\*

Test conditions:  
test solution of NaCl  
32 g/l, P=5,5 MPa,  
T=25 °C, pH=7,5.  
Recovery ~10%

\*

Flow of each single  
element in a batch may  
vary for +/-15%

\*\*

Nominal rejection  
is reached after  
48 hours of continuous  
operation on test  
solution

\*\*\*

Minimal rejection  
of a new element after  
20 minutes' test on  
test solution.


## Operating conditions

Model	Flow*		Rejection	Area		Spacer	
	m3/hr	GPD		m2	ft2	mm	mil
KM 8040-C	1,66	10500	99,75/99,55	39	420	0,71	28
KM 8040-C2	1,50	9500	99,8/99,6	37	400	0,79	31
KM 8040-C3	1,42	9000	99,8/99,6	35	375	0,86	34

Recommended operation pressure, MPa	4,5-6,5
Maximum operation pressure, MPa	7
Maximum pressure drop, MPa	0,07
Operation temperature, °C <sup>1)</sup>	4-45
pH at continuous operation at T<35°C	2-11
pH at continuous operation at T<45°C	3-10,5
Chemical cleaning, temperature, °C	T<45 T<35 T<25
CIP pH (short time operation)	2-11 1-11,5 1-12
Free chlorine content, mg/l max	0,1
Maximum feed flow, m3/hr	17
Concentrate/permeate ratio on each element, min	10:1
SDI (15 minutes test), max	5
Turbidity, NTU max	1

1)

During continuous  
work with pH over 10  
the temperature must  
not exceed 35°C

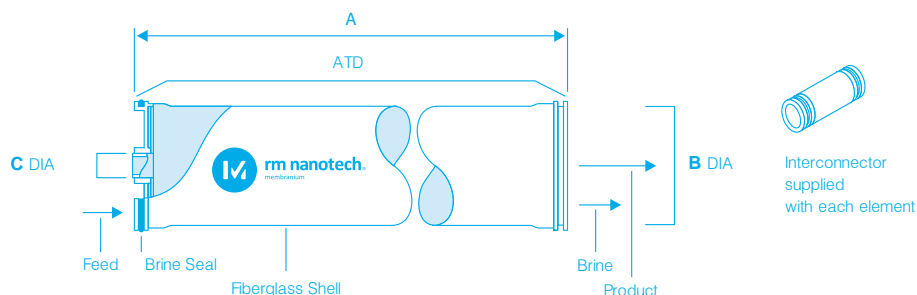

Model	A mm	B mm	B' (ATD) mm	C mm	Weight kg
KM 8040-C (2,3)	1016	203	200	28,6	15,5