




|   |   |   |  |  |                                  |                               |
|---|---|---|--|--|----------------------------------|-------------------------------|
| <b>Type</b>   | <b>Configuration:</b><br>Spiral Wound                         | <b>Membrane Polymer:</b><br>Composite Polyamide                 | <b>Brine Spacer Material:</b><br>Polypropylene             |  |                                  |                               |
| <b>Specifications</b>                                 | <b>Permeate Flow:</b><br>3600 gpd<br>(13,6 m <sup>3</sup> /d) | <b>* Permeate Flow:</b><br>5200 gpd<br>(19,7 m <sup>3</sup> /d) | <b>Salt Rejection:</b><br>99,1% nominal<br>(98,5% minimum) | <b>Nominal Membrane Area:</b><br>120ft <sup>2</sup><br>(11,2m <sup>2</sup> ) |                                  |                               |
| <b>Test Conditions</b><br>(After 30 min of operation) | <b>Applied Pressure:</b><br>150 psi<br>(10,3 bar)             | <b>* Applied Pressure:</b><br>225 psi<br>(15,5 bar)             | <b>Solution NaCl</b><br>1500 ppm                           | <b>Operating Temperature:</b><br>77 °F<br>(25 °C)                            | <b>Permeate Recovery:</b><br>15% | <b>pH Range:</b><br>6,5 ÷ 7,0 |

**Dimensions**

| A<br>Total Length        | B<br>ATD Diameter        | C<br>Connection Diameter | D <sub>F</sub><br>Core Tube Extension<br>Feed Side | D <sub>C</sub><br>Core Tube Extension<br>Conc. Side | Weight             |
|--------------------------|--------------------------|--------------------------|--|---|--------------------|
| 41.3 inches<br>(1049 mm) | 4.6 inches<br>(116,8 mm) | 0.75 inches<br>(19,1 mm) | 0.0 inches<br>(0,0 mm)                             | 2.19 inches<br>(55,6 mm)                            | 11 lbs<br>(5,0 Kg) |

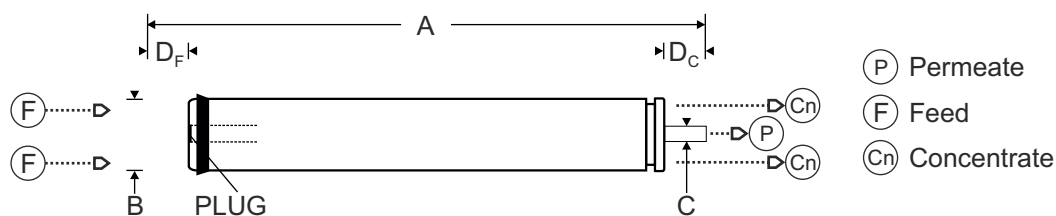

**Maximum Operating Limits**

| Operating Pressure<br>Fiberglassed | Operating Pressure<br>Tape Wrapped | Temperature       | Pressure Drop       | Feed Flow                         | Chlorine Concentration | Feedwater SDI (15min) | Feedwater Turbidity |
|------------------------------------|------------------------------------|-------------------|---------------------|-----------------------------------|------------------------|-----------------------|---------------------|
| 600 psi<br>(41,4 bar)              | 300 psi<br>(20,7 bar)              | 113 °F<br>(45 °C) | 10 psi<br>(0,7 bar) | 18 gpm<br>(4,1 m <sup>3</sup> /h) | <0,1 ppm               | 5,0                   | 1,0 NTU             |

| Other Operating Limits | Feedwater pH | Minimum ratio of concentrate to permeate flow for any element |
|------------------------|--------------|---|
|                        | 3,0 ÷ 10,0   | 5:1   |

The limitations shown in Operating Limits are for general use. The values may be more conservative for specific projects to ensure the best performance and longest life of the membrane.

**Notice:** Minimum permeate flow for individual elements 15 percent below listed flow. Elements are vacuum sealed in a polyethylene bag containing less than 1.0% sodium meta-bisulfite and 10% propylene glycol solution.

**Guidelines:** Permeate obtained from first hour of operation should be discarded.  
 Avoid static permeate-side backpressure at all times.  
 These membranes may be subject to drinking water application restrictions in some countries: please check the application status before use and sale.  
 For element loading use only glycerine to lubricate o-rings and brine seal.

The customer is fully responsible for the effects of incompatible chemicals on elements. The presence of free chlorine and other oxidizing agents will cause membrane failure, the damage is not covered under warranty. Oltremare believes the information and data contained herein to be accurate and useful. The information and data are offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. Oltremare assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Oltremare's products for the user's specific end uses. No performance warranties are given; all implied warranties of merchantability or fitness for a particular purpose are expressly excluded. Consult factory for detailed warranty information. We reserve the right to modify or amend specifications without prior notice.