


# Testomat 2000® DUO

**LENNTECH**

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289

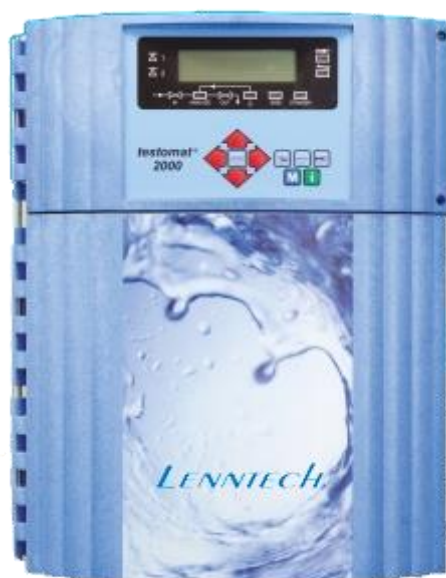

The **Testomat 2000® DUO** is a special design of the **Testomat 2000®**. You can measure 2 different parameters simultaneously, e.g. 2 measuring ranges for water hardness or water hardness and carbonate hardness. The monitoring of 2 measuring points is possible and there is an automatic measuring point switch over with possible suppression of the input contact.

## Application

- use in two circuits with different hardnesses
- measurement of inlet and outlet hardness

## Measuring range

0.05-25 °dH Water hardness

0.5-20 °dH Carbonate hardness

1-15 mmol/l p-value

0.05-0.5 mmol/l minus m-value

(depending on the choice of the indicator)

## Technical Data

**Power supply:** 230–240 VAC, 115 VAC, 24 VAC all 50–60Hz

**Power consumption:** max. 30 VA

**Protection class:** I

**Degree of protection:** IP 65

**Ambient temperature:** 10–45 °C, 50 - 104°F

**Option:** booster pump see accessories

**Dimensions (B x H x T):** 380 x 480 x 280 mm

**Weight:** approx. 9.5 kg

**Menu languages:** German, English, French, Italian, Polish (others upon request)

## Mains water supply

**Operating pressure:**

1 to 8 bar (15 to 116 psi) or

0,3 to 1 bar (5 to 15 psi), after removing of the valve body out of the regulator/filter housing

**Water inlet:** Opaque hose with 6 mm external diameter/4 mm internal diameter

**Water outlet:** Hose with 6 mm external diameter/4 mm internal diameter

**Water temperature:** 10 to 40 °C; 50 to 104°F